

# WORKPLACE SOLUTIONS

**KITS, COMPONENTS & ACCESSORIES**  
*for applied ergonomics*



NOW FEATURING  
**Qualtech**  
DATA CONTROL WORKSTANDS, WORKSTATIONS,  
& COMPUTER ENCLOSURES



Workplace Solutions



# Don't let your work area be a possible OSHA violation!



**Retrofit your existing workbench.**

**EASILY ASSEMBLED KITS,  
COMPONENTS and ACCESSORIES.  
See page 4 for details.**

## TABLE of CONTENTS

Description	Page	Description	Page	Description	Page
"Ergonomics Pays Dividends".....	3				
<b>WORKSTATION KITS &amp; ACCESSORIES</b>		<b>JIBS</b>		<b>Qualtech</b>	
"Update Your Workbenches".....	4	Bench Mounted Kits.....	18	<b>Workstands</b>	
Single Column Kits.....	5	Floor Mounted Kits.....	18-19	Document Stands.....	28
Dual Column, Straight Tool Rail Kits.....	6	Ceiling Mounted Kits.....	20	Information Stands.....	28
Curved Rail System Components.....	7	Retrievers.....	21	Message Board Stands.....	28
Balancers 0.5 to 23 lbs.....	8	Packaging Station Kit.....	21	Catalog Display Stands.....	29
Retractors 3 to 23 lbs.....	8	<b>MOBILE KITS</b>		Inspection Stands.....	29
Torque Reels 3 to 15 lbs.....	8	Shelf Cart Kits & Components.....	22	Blueprint Display Stands.....	29
Balancer Accessories.....	8	Rolling Bin Rack.....	22	Parts Caddy.....	29
Balancers 9 to 187 lbs.....	9	Gravity Feed Rack.....	22	Computer Enclosures, Industrial.....	30
Lights & Power Bars.....	10	Gravity Feed Cart.....	22	Kaizen Event Display Stand.....	30
Workstation Kit Accessories.....	11	Portable Workstation Kit.....	23		
Adjustable Foot Rest.....	11	Mobile Wire Spool Cart.....	23		
Air Lines.....	11	Mobile Test Station.....	23		
Swing Arms and Accessories.....	12-13	<b>COMPONENTS</b>			
Ergonomic TORQ-ARMS™.....	14	Aluminum Track.....	24		
Ergonomic Tool Positioners.....	15	Steel Track, 50 lb. capacity.....	25		
250 lb. Capacity Tool Rails.....	16	Steel Track, 30 lb. capacity.....	26		
250 lb. Capacity Suspended Tool Rail Kits.....	16	Booms, Mounting Bases.....	27		
Tool Cranes – 50 lb. & 250 lb.....	17				
Curved Rail System Components.....	18				

## WARRANTY

Gleason warrants for a period of twelve (12) months after date of shipment, all goods manufactured by it to be free from defects in material and workmanship. If, within such warranty period, any such goods are proved, to Gleason's satisfaction, to be defective, such goods shall be repaired or, at Gleason's option, replaced f.o.b. Gleason's factory, without charge. Gleason's obligation hereunder shall be confined to such repair or replacement and shall be further conditioned upon Gleason receiving written notice of any alleged defect within 10 days after its discovery and, at Gleason's option, the return of the alleged defective goods to Gleason, f.o.b. its factory.

The foregoing warranty shall not apply to goods not manufactured by Gleason, or to goods which shall have been repaired or altered by others than Gleason so as to, in Gleason's judgement, adversely affect the same, or which shall have been subject to other than normal use of service, negligence, accident, or improper maintenance care, or storage. With respect to goods furnished but not manufactured by Gleason, the warranty obligations of Gleason shall in all respects conform and be limited to the warranty extended to Gleason by the supplier.

The foregoing warranty is in lieu of all other express or implied warranties (except of title) and of all other obligations of Gleason.

# *Ergonomics Pays Dividends*

*If your company assembles, ships, or has an office, paying attention to workplace ergonomics increases productivity, reduces comp claims and costs, and improves employee morale.*

After much in-fighting, the OSHA Ergonomics Standard that became effective January 16, 2001, was voted down by the new congress. There is now no law to enforce ergonomic standards, but that doesn't mean your company won't benefit by properly designed and implemented workstations. Ask the insurance company that carries your liability and workers comp. They are vitally interested in the safety of your workplace, including ergonomic issues.

OSHA describes the problem as follows: "Work-related musculoskeletal disorders (MSDs) result when there is a mismatch between the physical capacity of workers and the physical demands of their jobs. Each year 1.8 million workers in the United States report work-related MSDs such as carpal tunnel syndrome, tendonitis and back injuries. About 600,000 MSDs are serious enough to result in workers having to take time off work to recover. **The solution to these injuries lies with ergonomics, the science of fitting the job to the worker.**"

Several factors make broad ergonomic standards or workplace rules difficult or even impossible to enforce:

- Ergonomics is "people based"; the tools and postures that help one person avoid MSDs may not help all. Each person is different.
- MSD symptoms tend to appear slowly, over time. By the time the worker begins to feel pain, it may be too late to avoid the injury.
- Personal worker comfort while performing a task may or may not mean the workstation is properly set up. For example, a worker may feel comfortable reaching for a part but may develop an MSD over time. Repetition is a factor.
- Each task tends to be different from an ergonomic standpoint.

Bleak as the above sounds, there are some basic factors.

The five risk factors, as defined by OSHA, are:

- Repetition...repeating same motions every few seconds for 2 hours or more at a time or using a device steadily for more than 4 hours daily.
- Force...lifting more than 75 lbs. at any one time or pushing/pulling with more than 20 lbs. of initial force.
- Awkward Postures...repeatedly raising or working with hands above the head for more than two hours a day or working with back, neck or wrists bent for more than two hours total per day.
- Contact Stress...using hand or knee as a hammer more than ten times an hour for more than two hours total per day.
- Vibration...using tools that typically have high vibration levels (chain saws, jack hammers, etc.) for more than 30 minutes per day or tools with moderate vibration (jigsaws, grinders, etc.) for more than two hours per day.

Note how "time" plays a significant role in the risk factors. This suggests that workers should be frequently "rotated" from job to job.

A second element is making sure the workstation fits the individual so as to, as much as possible, eliminate lifting, reaching, etc.

These two concepts, task rotation and work place customization, are at odds without properly equipped workstations. Workstations must be fully adjustable and easily configured to the task and the worker. The relatively small investment required to properly outfit your workstations pays big dividends in fewer injuries, improved employee moral and increased production, positively affecting your company's profits.


**Hubbell Workplace Solutions leads the way in solutions to ergonomics problems. Our broad, fully equipped line of modular workstations, tool balancers, torque arms, tool positioners and related equipment has found wide acceptance in ergonomically sensitive companies. In many workplaces, ergonomics was of relatively low importance until management became aware of the cost savings and increased production possible through the use of properly equipped workstations...workstations that can be adjusted to fit both the task and the worker.**



Workplace Solutions

# UPDATE YOUR EXISTING BENCH

**Easily, quickly, inexpensively retrofit old “beaters” as well as new benches.**

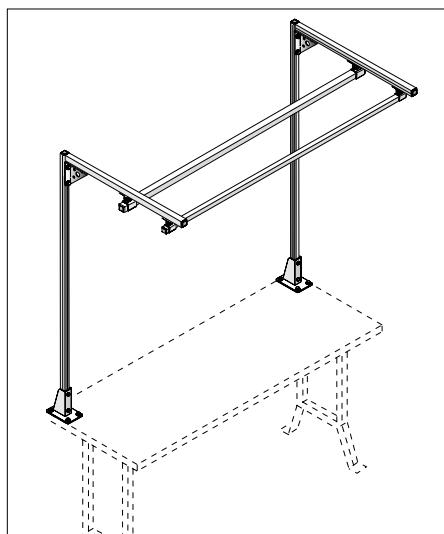


## KITS

Hubbell Workplace Solutions kits contain everything needed to assemble ergonomically sound fixed workstations or mobile productivity boosters. All fasteners are included, with most already in place. The only tools required are two wrenches and a tape measure (drilling may be required to secure workstation to some benches). To complete assembly, attach bases to the bench (three styles of bases are available), slide components into position and tighten hardware. Fully customize with readily available components and accessories to make each workstation fit the task and fit the people performing the task. That's practical, affordable ergonomics.




**Older bench equipped with new workstation kit and optional accessories.**

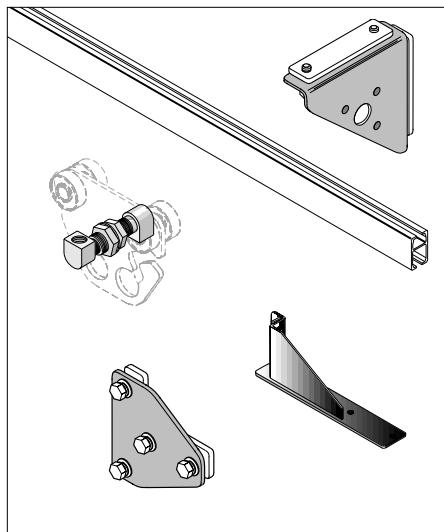

## COMPONENTS

Most components which make up Hubbell Workplace Solutions kits are available separately. Components are often added to basic kits, further customizing them to fit the task. Components may also be used to construct workstations or other equipment using the practical “slide & clamp” assembly method. Where applicable, components include track nuts or clamp bars, plus other hardware, required for assembly.

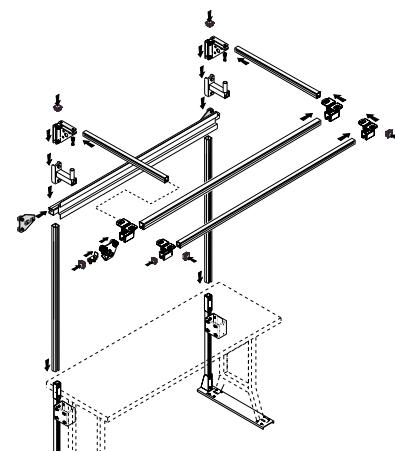

**Kits, components and accessories assemble easily. Just slide into place and tighten.**



## ACCESSORIES

Hubbell Workplace Solutions workstation accessories increase utilitarian value and make the workplace more user friendly by adding functions. Typical accessories include; adjustable swing arms with a variety of attachments, torque neutralizing arms and tool positioners, air manifolds, bars for holding plastic tote bins, shelves, and lights. Accessories can be installed easily on HWS fixed or portable workstation kits.



**Mobile productivity booster kits are complete, including all hardware. Assembly is required.**

**SINGLE COLUMN KITS** are the efficient and economical way to meet ergonomic requirements. Each kit is complete with 180° swing or fixed boom, safety hook or balancer trolley and Universal Bracket for mounting everything from an air line fitting to peg board. Some models also include tool balancer, coiled air line, brass air line fitting and cord grip for use with electric tools. It's ready to mount on your work bench then customize...add swing arms with attachments, as shown below right, or other items as required. Horizontal boom has rated maximum capacity of 30 lbs.(13.5 kg). Bolts to any bench top. Hardware for mounting jib to bench not included. Balancer is easily adjusted to support tool weight allowing maximum productivity with minimum effort. Tool not included.





**36" (914mm) LONG BOOM WORK STATION KIT** (above, left) includes (1) fixed or swing 3 ft. WS30 swing boom, (1) 5 ft. WS50 vertical column, (1) 1.5, 2.5, or 5.0 lb. tool balancer, (1) balancer trolley, (1) end stop (with trolley only), (2) end caps, (1) #WS-UH universal bracket, (1) brass air fitting, (1) cord grommet, (1) coiled 1/4" air line, (1) mounting base, all hardware required for assembly. Mounting fasteners not included. Does not include tool.

**24" (610mm) LONG BOOM WORK STATION KIT** (above, right) includes (1) fixed or swing 2 ft. WS30 boom, (1) 4 ft. WS50 vertical column, (1) balancer trolley or end stop hook, (1) end stop (with trolley only), (2) end caps, (1) angle bracket (fixed boom only), (1) #WS-UH universal bracket, (1) mounting base, and all assembly hardware. Does not include fasteners for mounting base to bench. Does not include swing arms, balance reel, tool, air line or fittings shown in illustration.

#### WS30 boom for total loads to 30 lbs. (13.5 kg)

Min.-Max. BALANCER CAPACITY	TROLLEY MODEL NUMBER	BOOM LENGTH & TYPE	VERTICAL COLUMN HEIGHT	WITH HOOK MODEL NO.	WITH TROLLEY MODEL NO.
0.5-1.5 lbs.	WS30-BTS	36" Swing	5' (1.5m)	na	WTS-050301
1.5-3.0 lbs.	WS30-BTS	36" Swing	5' (1.5m)	na	WTS-050302
3.0-5.0 lbs.	WS30-BTS	36" Swing	5' (1.5m)	na	WTS-050305
0.5-1.5 lbs.	WS30-BTS	36" Fixed	5' (1.5m)	na	WTF-050301
1.5-3.0 lbs.	WS30-BTS	36" Fixed	5' (1.5m)	na	WTF-050302
3.0-5.0 lbs.	WS30-BTS	36" Fixed	5' (1.5m)	na	WTF-050305
na	WS30-BTL*	24" Swing	4' (1.2m)	WHS-020400	WTS-020400
na	WS30-BTL*	24" Fixed	4' (1.2m)	WHS-020400	WTF-020400

\* Only on models supplied with trolley.

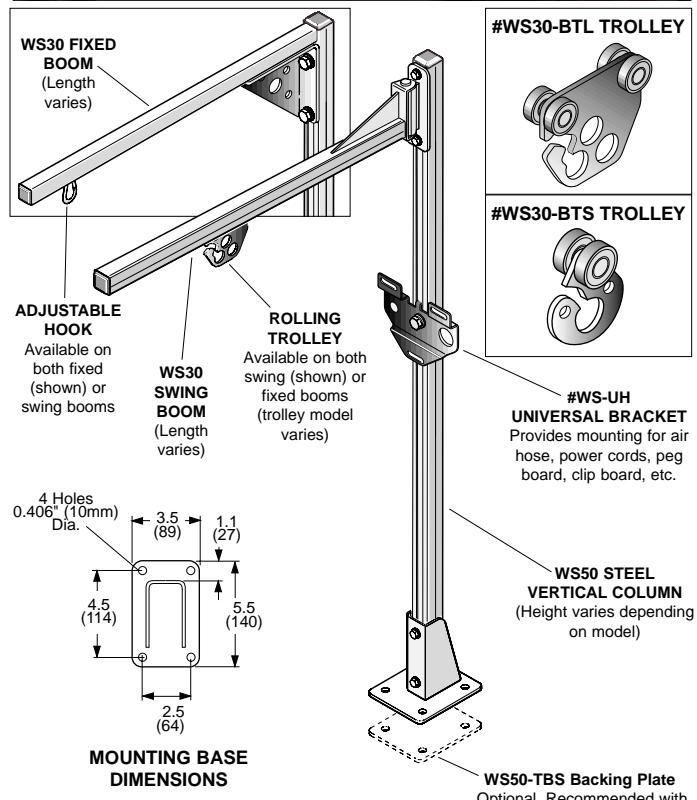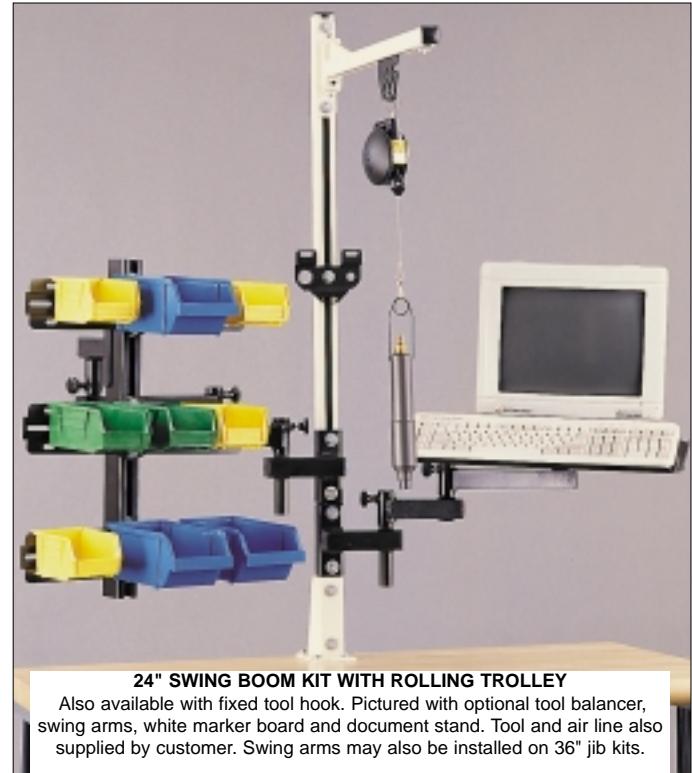

# TOOL RAIL KITS

## KITS

### DUAL RAIL, DUAL COLUMN, BENCH SUPPORTED




**DUAL COLUMN WORKSTATION KITS** include two straight rails, your choice of three mounting base styles and in a range of heights to fit virtually any bench and any task you have. Height of horizontal support rails is adjustable, as is position of rails and width (distance between vertical columns). Kits include one WS30 and one WS50 rail. Either or both may be used as tool rail by adding **optional** balancer trolleys. Trolley mounted TORQ-ARM™ may be used, as can most accessories. Additional components may be added to make these workstations even more functional. Consult your Hubbell Workplace Solutions distributor or contact the factory for more details.

**TOOL RAIL KITS** include (1) WS30 rail with hangers, (1) WS50 rail with hangers, (2) WS50 vertical columns, (2) WS50 horizontal 36" rails, (2) angle brackets with hardware, (2) bases as shown, (4) end stops, (8) end caps, and all assembly hardware.

**WS-50 SUPPORT RAILS**  
3 ft.(0.9m) long.  
Reach full depth of bench.  
End caps included.

**WS30 and WS50 TOOL RAILS**  
4', 5', or 6' (1.2, 1.5, 1.8m) length. Include hangers, end stops, and end caps.

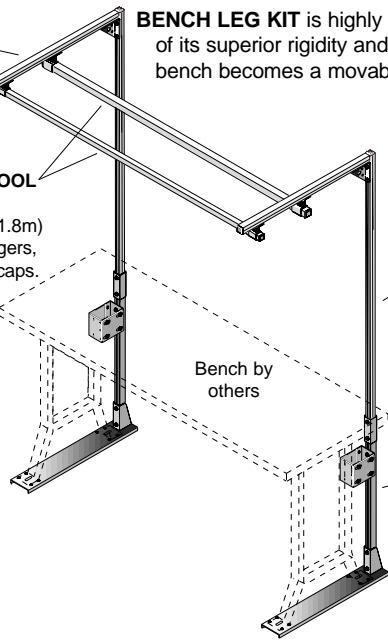

**BENCH LEG KIT** is highly popular because of its superior rigidity and durability. The bench becomes a movable workstation.


**WS50 VERTICAL COLUMNS**

RAIL WIDTH ft. (m)	HEIGHT ABOVE FLOOR	
	7 ft. (2.1m) (1)	7 ft. (2.1m) (1)
	30"(762) BASE	36"(914) BASE
4.0 (1.2)	#WKF-030740	#WKF-030746
5.0 (1.5)	#WKF-030750	#WKF-030756
6.0 (1.8)	#WKF-030760	#WKF-030766


**NOTE 1:** Nominal floor to top of vertical rail is 7'(2.1m). For 8'(2.4m) high models, change 7 in model number to 8, ie: WKF-030840.

#### #WS50-UF30 or WS50-UF36 BENCH LEG BASES

Bolt or weld to bottoms and back uprights of legs. Mounting bracket fully adjustable. Available for 30"(762mm) or 36"(914mm) bench depth. Base predrilled to fit most standard benches cataloged by **Edsal, Equipto, Lyon, Penco** and similar.

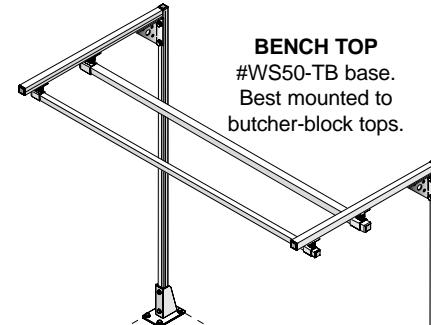

**BENCH TOP**  
#WS50-TB base.  
Best mounted to butcher-block tops.

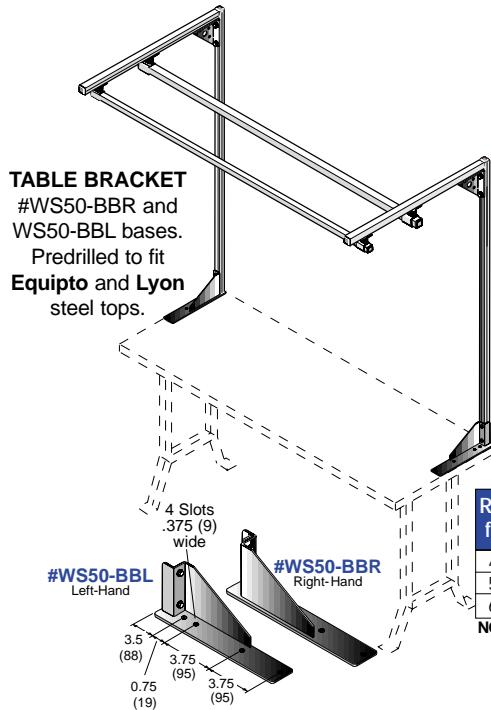

**TABLE BRACKET**  
#WS50-BBR and WS50-BBL bases.  
Predrilled to fit **Equipto** and **Lyon** steel tops.


#### STRAIGHT RAIL BENCH TOP KITS

RAIL WIDTH ft. (m)	HEIGHT ABOVE BENCH	
	5 ft.(1.5m) (2)	6 ft.(1.8m) (2)
4.0 (1.2)	#WGB-030540	#WGB-030640
5.0 (1.5)	#WGB-030550	#WGB-030650
6.0 (1.8)	#WGB-030560	#WGB-030660

#### STRAIGHT RAIL TABLE BRACKET KITS

RAIL WIDTH ft. (m)	HEIGHT ABOVE BENCH	
	5 ft.(1.5m) (2)	6 ft.(1.8m) (2)
4.0 (1.2)	#WKB-030540	#WKB-030640
5.0 (1.5)	#WKB-030550	#WKB-030650
6.0 (1.8)	#WKB-030560	#WKB-030660

**NOTE 2:** Height of bench will determine Tool Rail height.

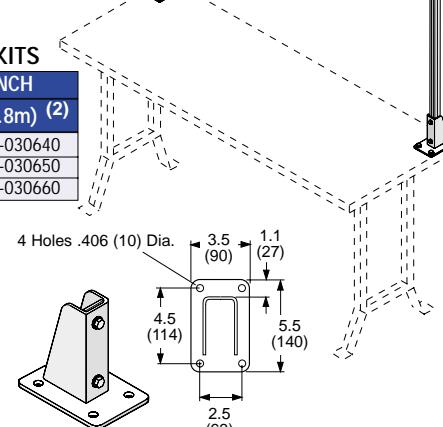


**MOUNTING BASE DIMENSIONS**

**WS50-TBS** Backing Plate  
(Same size as Mounting Base)  
Optional

**WS50-BBS** Backing Plate  
(Same size as Mounting Base)  
Optional

#### BALANCER TROLLEY

#WS30-BTL for WS30 rail.  
#WS50-BTL for WS50 rail.  
Order separately.





## COMPONENTS



Workplace Solutions

# CURVED RAIL FOLLOWS THE WORK GUIDES TOOLS AND CONTROLS AROUND CORNERS

UNIQUE DIAMOND RAIL track and matching trolleys allow tools or control boxes to follow assembly line or conveyor path. Curved sections with 3 ft. (0.9m) radius form 90° corner and connect to other curved or straight track sections for smooth, non-stop trolley movement. Design and build your own system from components shown below. Threaded hangers may be hung from overhead beams or from WS50 rail using standard track nut. Trolleys include safety flanges to prevent fall if rollers fail.

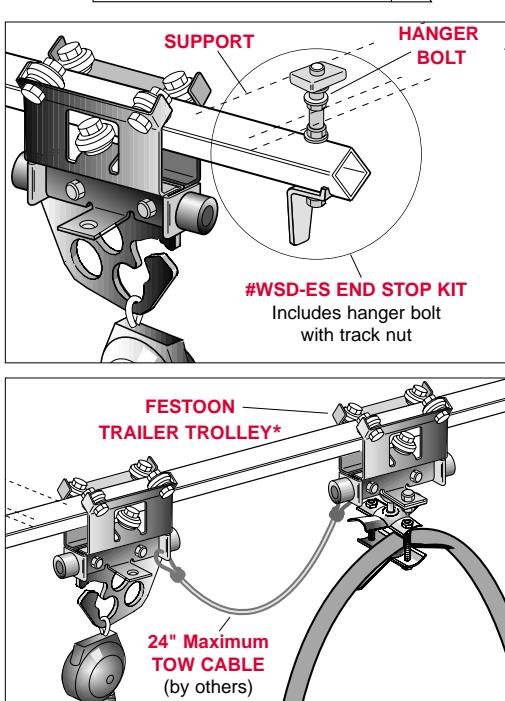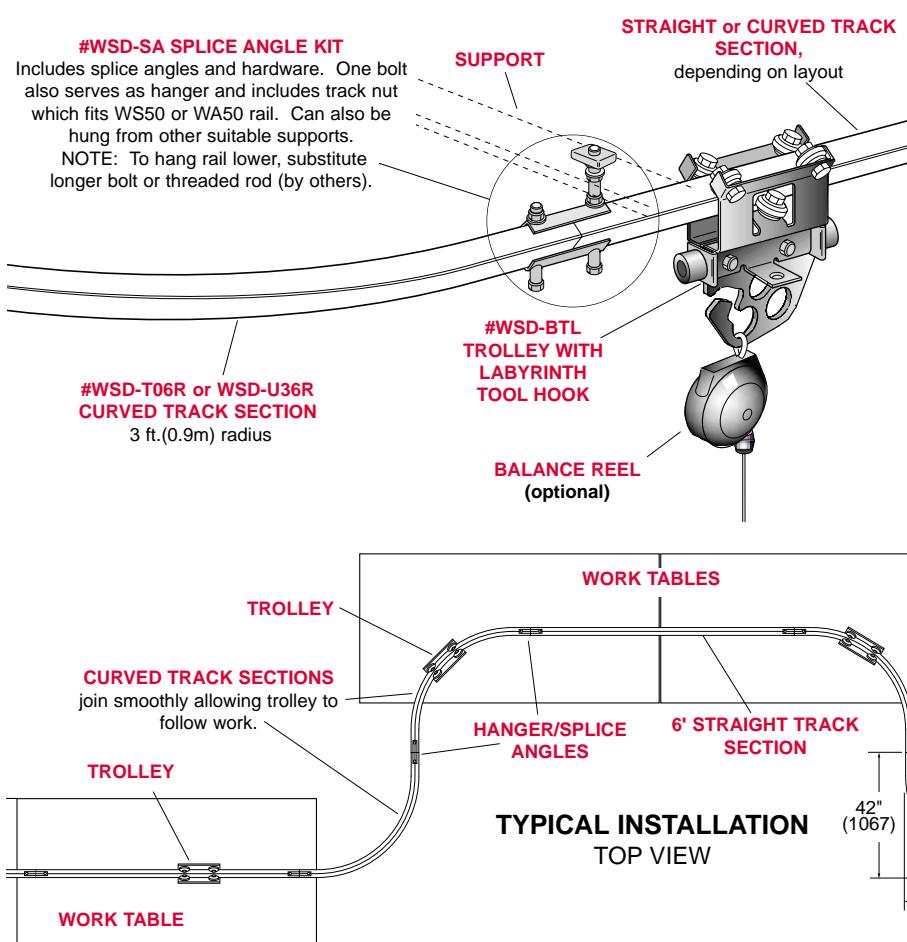

## COMPONENT CHART

DESCRIPTION	FINISH	MODEL NO.
6' (1.8m) STRAIGHT TRACK SECTION	BEIGE POLYESTER	WSD-T06
	UNFINISHED	WSD-U06
90° x 36" (914mm)radius CURVED TRACK SECTION	BEIGE POLYESTER	WSD-T36R
	UNFINISHED	WSD-U36R
SPLICE ANGLE KIT includes (2) angles, hanger bolt, splice bolt, nuts & washers	ZINC PLATED	WSD-SA
END STOP KIT (right, top) includes end stop, hanger bolt, nuts & washers	ZINC PLATED	WSD-ES
TROLLEY-LABYRINTH TOOL HOOK	BLACK POLYESTER	WSD-BTL
FESTOON TRAILER TROLLEY*	BLACK POLYESTER	WSD-RC12

\* **FESTOON TRAILER TROLLEY** (right, bottom) provides easy management of cord or hose supplying power to tool. Fits cable or hose 0.60–0.94" (15–24mm) diameter. Tow cable connecting tool trolley to trailer trolley should not exceed 24" in length.

# TOOL BALANCERS

## MAKE TOOLS WEIGHTLESS


### RELIABLE & ECONOMICAL SERIES "BD"

**SERIES "BD" TOOL BALANCERS** are the economical choice for balancing tools weighing up to 5 lbs(2.3kg). Molded ABS housing has a smooth exterior with rounded edges designed for maximum ergonomic appeal. Series "BD" balancers are the most modern, easiest to adjust, and reliable available. Each balancer incorporates all of the important functions expected of a world class product.

#### SEVEN WAYS BETTER:

- 1- Hand-windable spring tension adjustment knob is flush with the housing.
- 2- Push-button tension release simplifies decrease of spring tension.
- 3- Rugged steel upper swivel hook with secondary safety cable provision.
- 4- Over-sized cable opening with direct in-line pull to reduce cable wear.
- 5- 270 lb(121.5kg) test 0.047"(1.2mm) dia. 7 x 7 strand galvanized steel aircraft cable nylon covered to 0.063"(1.6mm) O.D.
- 6- Adjustable cable stop and lower safety hook.
- 7- Matte black finish to minimize reflected light and reduce eye strain.

#### SERIES "BD" DIMENSIONS

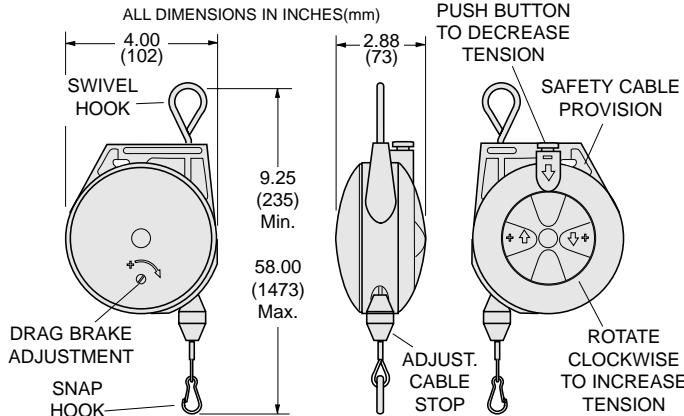

#### SELECTION CHART

MIN - MAX LOAD lbs. (kg.)	CABLE LENGTH* ft. (m.)	REEL WEIGHT lbs. (kg.)	MODEL NUMBER
0.5 - 1.5 (0.2 - 0.7)	6 (1.8)	1.2 (0.5)	BD-01
1.5 - 3.0 (0.5 - 1.4)	6 (1.8)	1.3 (0.6)	BD-03
3.0 - 5.0 (1.4 - 2.3)	6 (1.8)	1.5 (0.7)	BD-05

\*Cable lengths listed are for "active" or "working" cable. Includes cable stop and safety hook.

## BALANCER ACCESSORIES

### #STC-01 SAFETY CLIP

Bright zinc plated steel safety latch for tool attachment and other uses. Measures 2.375"(60mm) long. One included with each BG reel. Rated capacity-70 lbs.

### CLEVIS HANGERS

Galvanized forged steel hangers for mounting balancers, torque reels, etc. Measure 0.50" (13mm) between jaws. One #CVF-01 straight clevis included with each "BG" & "TQ" reel. #CVF-11 swivel clevis is optional extra. Pins included.

Rated capacity-500 lbs.



### ADJUSTABLE CABLE SADDLE

Hangs from balancer cable above tool to provide strain relief for electrical cable or air hose. Available in three sizes.

Includes safety clip.



CABLE DIAMETER in. (mm)	MODEL NO.
0.3 - 0.59 (7 - 14)	CS-F1
0.6 - 0.94 (15 - 23)	CS-F2
0.95 - 1.25 (24 - 31)	CS-F3

Nylon covered steel cable with safety clip. Brings tool closer to work area without unwinding cable from reel or mounting reel at a lower height.

### OVERHANG CABLE

LENGTH ft. (m)	MODEL NO.
3 (0.9)	OC-03
5 (1.5)	OC-05
10 (3.0)	OC-10
15 (4.6)	OC-15

OVERHANG CABLE

## ACCESSORIES



Workplace Solutions


### HEAVY DUTY SERIES "BG"

**SERIES "BG"** reels feature rugged steel construction with black polyester baked finish, reinforced hanging bracket with forged clevis for ceiling mounting and extra holes for safety chain attachment. Spring is permanently lubricated and provides constant tension, adjustable for balancing tool in normal working zone (6 - 18 in. [152-457mm]). Cable is 920 lb.(414kg) test 0.09"(2.3mm) dia. 7 x 7 strand galvanized steel aircraft cable nylon covered to 0.12"(3.0mm) O.D. Includes safety tool clip and adjustable cable stop.



**LOCKING MODELS** include all features listed above plus a positive ratchet lock mechanism to allow locking of the cable at a specific height. A slight pull on the cable releases the lock which functions like a window shade. Lock feature may be disengaged externally when constant tension is required.

Also see RETRIEVERS in this catalog.

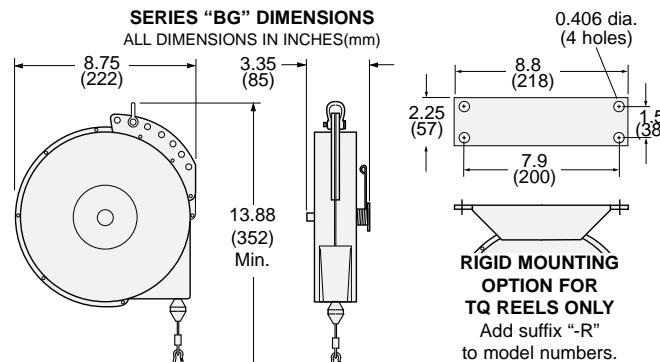

### SELECTION CHART

MIN - MAX LOAD lbs. (kg.)	CABLE LENGTH* ft. (m.)	RATCHET LOCK	REEL WEIGHT lbs. (kg.)	MODEL NUMBER
------------------------------	---------------------------	--------------	---------------------------	--------------

#### BALANCERS (CONSTANT PULL REELS)

May be adjusted to balance through 6-18 in. (152-457mm) range.

3 - 7 (1.4 - 3.2)	8 (2.4)	No	10 (4.5)	BG-03
5 - 10 (2.3 - 4.5)	8 (2.4)	No	10 (4.5)	BG-07
8 - 12 (3.6 - 5.4)	8 (2.4)	No	10 (4.5)	BG-10
10 - 15 (4.5 - 6.8)	8 (2.4)	No	10 (4.5)	BG-15
16 - 23 (7.2 - 10.4)	8 (2.4)	No	10 (4.5)	BG-20
16 - 23 (7.2 - 10.4)	8 (2.4)	No	10 (4.5)	BG-20SH**
22 - 27 (9.9 - 12.2)	8 (2.4)	No	10 (4.5)	BG-25

#### RETRACTORS (RATCHET LOCK)

Retract tool upward when manually released.

3 - 7 (1.4 - 3.2)	8 (2.4)	Yes	10 (4.5)	BG-03-L
5 - 10 (2.3 - 4.5)	8 (2.4)	Yes	10 (4.5)	BG-07-L
8 - 12 (3.6 - 5.4)	8 (2.4)	Yes	10 (4.5)	BG-10-L
10 - 15 (4.5 - 6.8)	8 (2.4)	Yes	10 (4.5)	BG-15-L
16 - 23 (7.2 - 10.4)	8 (2.4)	Yes	10 (4.5)	BG-20-L
16 - 23 (7.2 - 10.4)	8 (2.4)	Yes	10 (4.5)	BG-20-LSH**
22 - 27 (9.9 - 12.2)	8 (2.4)	Yes	10 (4.5)	BG-25-L

#### TORQUE REELS (RATCHET LOCK AND LONGER CABLE)

3 - 7 (1.4 - 3.2)	15.0 (4.5)	Yes	12.0 (5.4)	TQ1507***
5 - 10 (2.3 - 4.5)	15.0 (4.5)	Yes	12.0 (5.4)	TQ1510***
10 - 15 (4.5 - 6.8)	15.0 (4.5)	Yes	12.0 (5.4)	TQ1515***

\*Cable lengths listed are "active" or "working" cable.

\*\*Includes BG-SH "Shock Stop". See Below.

\*\*\*Clevis mount. For rigid mount add "-R" to model number.

LENGTH ft. (m)	MODEL NO.	OVERHANG CABLE	"SHOCK STOP" SHOCK ABSORBER
3 (0.9)	OC-03		
5 (1.5)	OC-05		
10 (3.0)	OC-10		
15 (4.6)	OC-15		

MODEL NO.  
BG-SH

## ACCESSORIES



# TAPERED DRUM TOOL BALANCERS

**DRUM COMPENSATES FOR CHANGING SPRING RATE**

**Make the job easier and safer, reduce operator fatigue and increase productivity. Direct spring powered...no motors or expensive gear trains to break or wear out.**



Series "BH-02" through "BH-05"



Series "BH-09" through "BH-70"



Series "BH-85"

Series "BH" Tapered Drum tool balancers keep tools within reach and reduce damage to tools by suspending them out of the way above the work surface. Risk of repetitive motion injury is reduced because only a light, downward force is required to place the tool in proper operating position. As the tool is lowered, and the spring is wound more tightly, the effective drum diameter increases to compensate for the increased force. Thus, when properly adjusted, the tapered drum keeps the tool at the positioned height.


### Features include:

- Rugged die cast aluminum housing.
- Both top and bottom hooks have spring-loaded safety latches.
- Heavy duty steel wire rope.
- Automatic safety catch...prevents free-spooling if springs fail (not available on BH-02/BH-05).
- Easy adjustment with everyday tools from outside housing.

Selection Chart

For Tool Weighing*	Cable Length**	Shipping Weight	Model Number
1.1 – 4.4 lbs.	3.3 ft.	2.2 lbs.	BH-02
2.2 – 6.6 lbs.	4.3 ft.	2.8 lbs.	BH-03
5.5 – 11 lbs.	4.3 ft	3.3 lbs.	BH-05
9 – 20 lbs.	4.3 ft.	13.4 lbs.	BH-09
20 – 33 lbs.	3.9 ft.	13.4 lbs.	BH-15
33 – 48 lbs.	4.5 ft	22.6 lbs.	BH-22
48 – 66 lbs.	4.5 ft.	22.6 lbs.	BH-30
66 – 88 lbs.	4.5 ft.	27.0 lbs.	BH-40
88 – 110 lbs.	4.5 ft.	27.0 lbs.	BH-50
110 – 132 lbs.	4.5 ft.	31.4 lbs.	BH-60
132 – 154 lbs.	4.5 ft.	31.4 lbs.	BH-70
154 – 187 lbs.	4.5 ft.	58.4 lbs.	BH-85

\* Tool weight includes hose or cord and other attachments which must be supported by balancer.

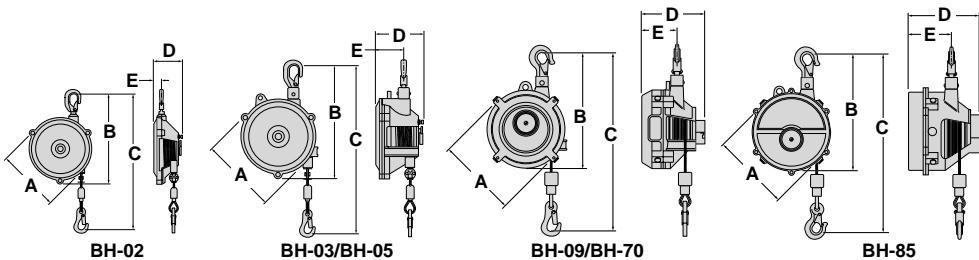

Dimensional Chart

Models	A	B	C**	D	E
BH-02	5.00 in.	7.25 in.	11.25 in. min.	1.81 in.	0.81 in.
BH-03/BH-05	5.83 in.	8.25 in.	12.50 in. min.	2.72 in.	1.44 in.
BH-09/BH-15	7.00 in.	10.00 in.	13.00 in. min.	5.50 in.	2.88 in.
BH-22/BH-70	8.60 in.	12.60 in.	17.00 in. min.	6.40 in.	3.19 in.
BH-85	9.50 in.	14.00 in.	20.00 in. min.	9.75 in.	5.38 in.

\*\* Minimum height fully retracted, inside of hook to inside of hook.

### Safety Chain (recommended)

Description	Shipping Weight	Model Number
2.0 ft. Steel Link Chain w/ Clevises	1.5 lbs.	SC-BH2
3.0 ft. Steel Link Chain w/ Clevises	2.0 lbs.	SC-BH3

# WORK LIGHTS and POWER BARS

## ACCESSORIES

### POWER-UP...AND PUT SOME LIGHT ON THE SUBJECT

Here are fitting touches to your workplace...a fluorescent, overhead work light and a power bar. Both are custom designed for use on Workplace Solutions workstations. Three **Work Lights** are available. One has adjustable mounting brackets and two 48" fluorescent T8 lamps (included). The two others have fixed brackets...one includes four 48" tubes, the other four 24" tubes. **Power Bar** is available in two lengths; 36" with six grounded outlets and 60" with ten outlets. Power Bar features on/off switch, circuit breaker with reset button and mounting bar. Order mounting bar to fit width of your workstation. Mounting hardware is included. Lights include 10' cord and power bar includes 6' cord with standard 110v AC grounded plugs.



DESCRIPTION	MODEL NUMBER	FC* @ 3'	FC* @ 4'
48" Two Tube Adjustable Workstation Light	WBL-204A	93	70
48" Four Tube Fixed Workstation Light	WBL-404	185	130
24" Four Tube Fixed Workstation Light	WBL-402	110	77
"Z" Bracket to raise light flush with supports	WBL-40X-AM	na	na
36" Power Bar with 36" Mounting Bar	WPB-303A	na	na
36" Power Bar with 48" Mounting Bar	WPB-304A	na	na
36" Power Bar with 60" Mounting Bar	WPB-305A	na	na
36" Power Bar with 72" Mounting Bar	WPB-306A	na	na
60" Power Bar with 60" Mounting Bar	WPB-505A	na	na
60" Power Bar with 72" Mounting Bar	WPB-506A	na	na


\* One foot-candle is equal to one lumen per square foot.

#### WORK LIGHTS FEATURE:

- Parabolic louver. Directs light toward work area, not eyes.
- Accepts T8 fluorescent lamps.
- Polycarbonate safety tubes. Protect lamps, increase safety and meet OSHA, FDA, NEC and USDA requirements preventing contamination in case of lamp breakage.
- Model WBL-204A tilts 15° fore or aft and adjusts to bench width.
- Blacked-out side lens minimizes stray light.

#### POWER BARS FEATURE:

- Grounded outlets and plugs.
- On/off switch and circuit breaker with reset.
- Mounting bracket and hardware in length to fit your work bench.

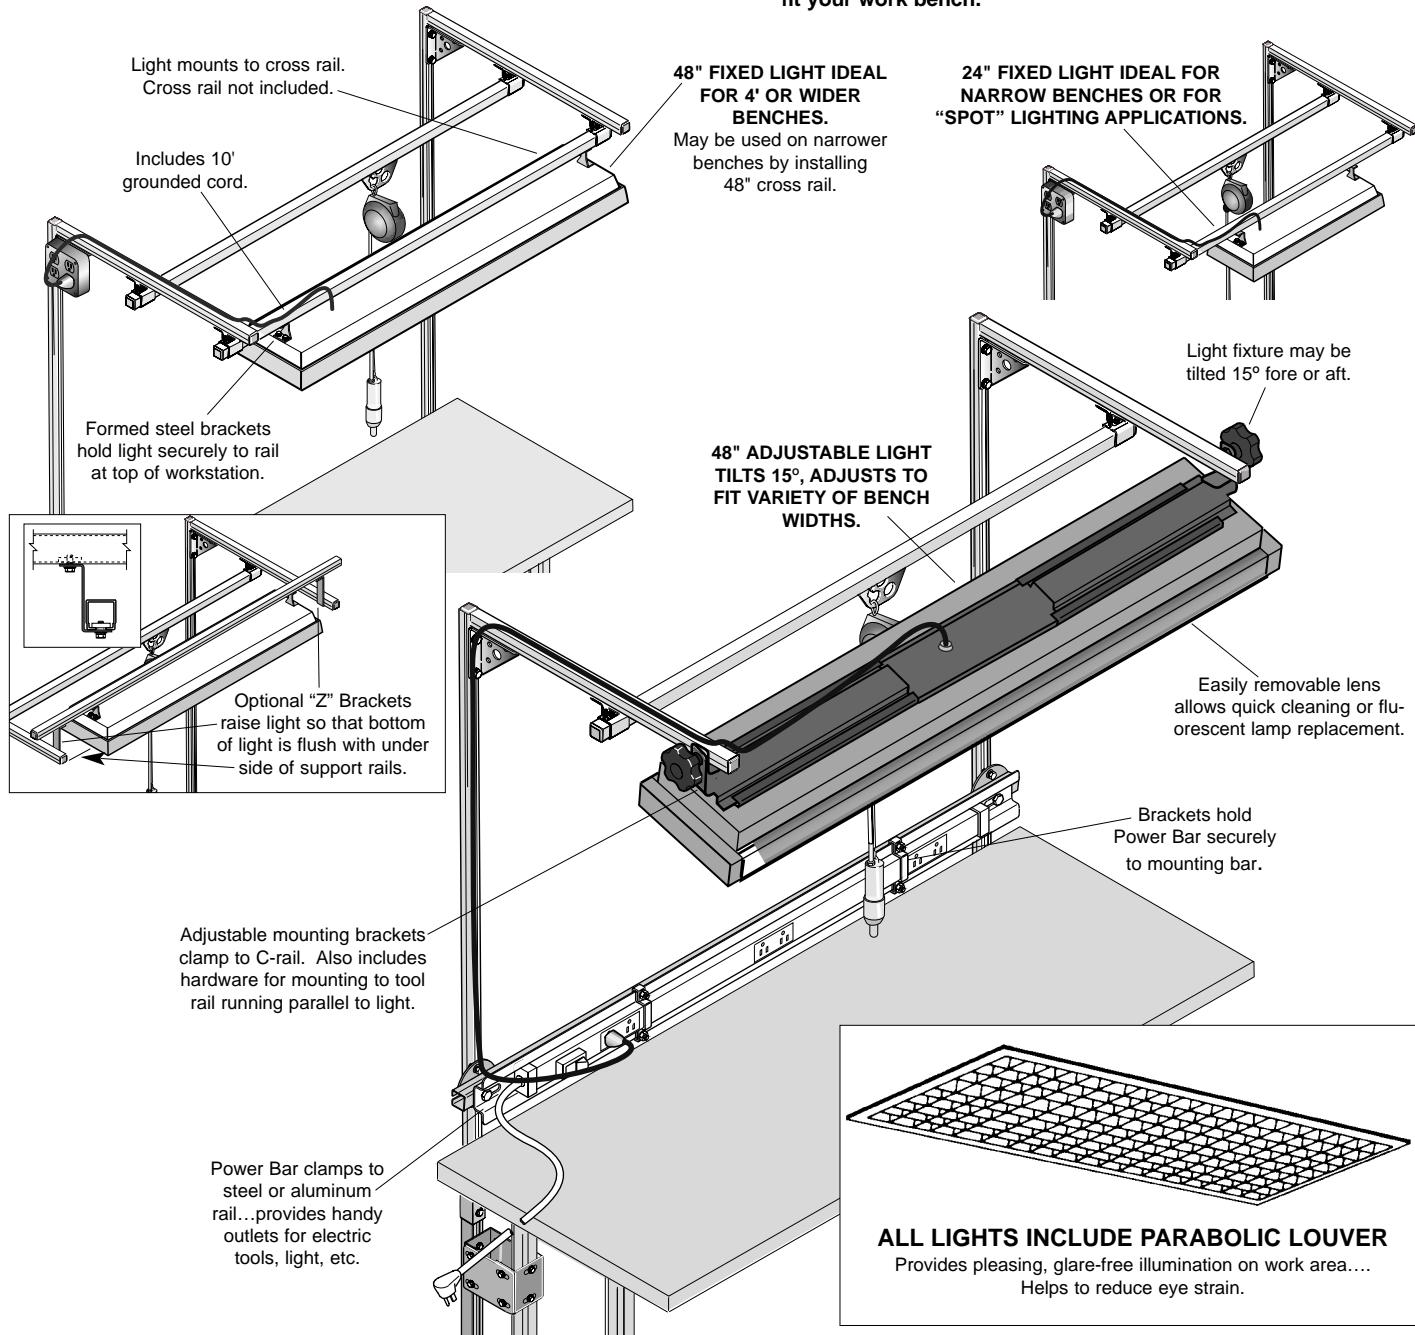

## ACCESSORIES



# ADD ACCESSORIES TO YOUR KIT

## MAKE YOUR WORKSTATIONS DO ALL THEY CAN DO

### MANIFOLD WITH BRACKETS

#### NEW DESIGN


Square tubing provides 66% more volume than former round tube. Ideal where multiple tools are used. Drilled and tapped for 3/8" NPT air inlets and outlets (see chart below for quantity). Mounts to vertical columns or top rails on workstations. Beige Polyester Finish. Mounting hardware included.



WIDTH ft. (m)	No. TAPS	SHIPPING WEIGHT	MODEL NUMBER
3.0 (0.9)	3	18 lbs.	WMAN-03C
4.0 (1.2)	4	22 lbs.	WMAN-04C
5.0 (1.5)	5	28 lbs.	WMAN-05C
6.0 (1.8)	6	33 lbs.	WMAN-06C
7.0 (2.1)	7	37 lbs.	WMAN-07C
8.0 (2.4)	8	42 lbs.	WMAN-08C

### BIN BAR WITH BRACKETS

Holds hanging plastic bins. Mounts to WS50 or WA50 vertical columns. Beige Polyester Finish. Includes mounting brackets and hardware. Accepts Akro, Lewis, Nestier, Duralene and other brands of bin boxes. Maximum capacity 50 lbs.(22.5kg).

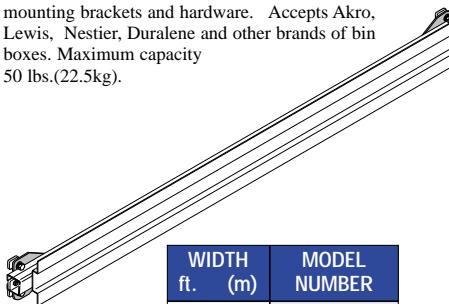

WIDTH ft. (m)	MODEL NUMBER
3.0 (0.9)	WS50-BB03A
4.0 (1.2)	WS50-BB04A
5.0 (1.5)	WS50-BB05A
6.0 (1.8)	WS50-BB06A
7.0 (2.1)	WS50-BB07A
8.0 (2.4)	WS50-BB08A
9.0 (2.7)	WS50-BB09A

### SHELVES WITH BRACKETS

Hold up to 50 lbs.(22.5 kg). of parts, tools, etc. Adjustable tilt. Style "A", in 12" or 18" depth, mounts between vertical columns (column spacing fixed). Style "B" (12" deep only) mounts on front of columns (brackets may be adjusted to match column spacing). Polyester Finish. Shelves beige, brackets black. Mounting hardware included.



WIDTH in. (mm)	MODEL NUMBER
<b>Style "B"-12"(305) Deep</b>	
30.0 (812)	WS50-SS03A
42.0 (1117)	WS50-SS04A
54.0 (1422)	WS50-SS05A
66.0 (1727)	WS50-SS06A
Brackets Only	WS50-SS00A
<b>Style "A"-18"(457) Deep</b>	
30.0 (762)	WS50-SS183
42.0 (1067)	WS50-SS184
54.0 (1372)	WS50-SS185
66.0 (1676)	WS50-SS186


\*Center-to-center spacing of vertical columns must be **WIDTH + 2"** (51mm) for Style "A" shelves.

## ADJUSTABLE FOOT REST


### EASY ON THE LEGS

Seated or standing, your workers can be more productive and more comfortable when a foot rest is used. In addition, use of a foot rest offers a degree of protection from back or leg strain. Fully adjustable and strong enough for heavy industrial applications, it's constructed of steel with extruded aluminum foot bar. Standard model measures 29" wide, 12.75" deep and 12.25" high. Smaller "under desk" version measures 23" wide. Both rest on four non-skid rubber feet. The foot bar is easily adjustable from 4" to 11" above the floor and tilts 15° fore and aft. Frame is finished with matte black baked polyester coating. Foot bar is natural aluminum with two anti-skid strips.

DESCRIPTION	MODEL NUMBER
Standard Adjustable foot rest	HWS-FR01
Office "under desk" foot rest	HWS-FR02

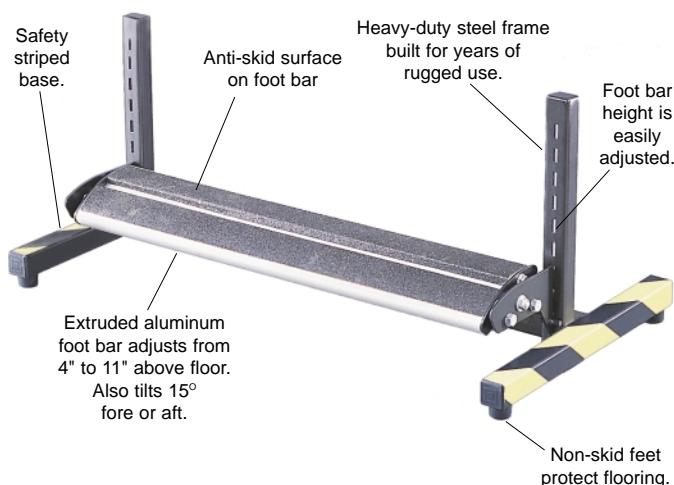

## AIR LINES

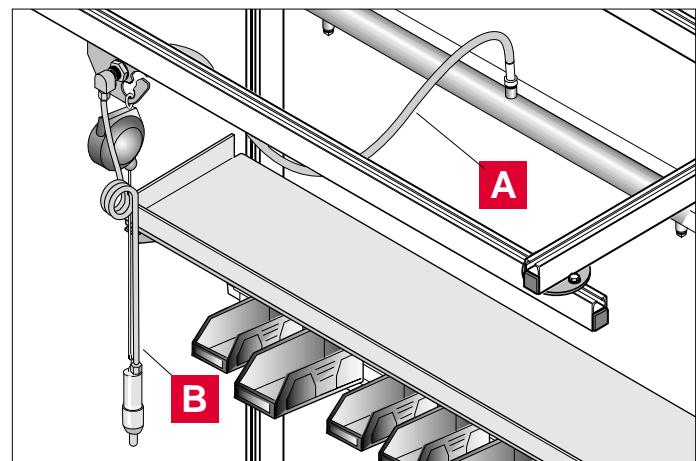

**A** The most flexible air line we have found. Ideal for connecting tool trolley to manifold or other supply because its flexibility does not interfere with trolley movement. Clear, reinforced plastic, 3/8" I.D. with 3/8" NPT male swivel fittings on both ends.

LENGTH ft. (m)	MODEL NUMBER
2 (0.6)	HWS-AL02
3 (0.9)	HWS-AL03
4 (1.2)	HWS-AL04
5 (1.5)	HWS-AL05
6 (1.8)	HWS-AL06

**B** Coiled hose from trolley to tool. Transparent blue polyurethane hose is flexible and light weight, doesn't interfere with tool positioning. Excellent memory retention. High chemical resistance. 3/8" O.D. x 1/4" I.D. x 4' extended length. 1/4" NPT male swivel fitting both ends.


MODEL NUMBER
HWS-AC04

# SWING ARMS


## MAKE YOUR WORKPLACE USER FRIENDLY

Swing arms, with a variety of attachments, can be added to existing workstations or benches. Column mounts clamp on any **WS50** or similar column or rail. Bench mount can be bolted to any level surface. Arms, elbows and attachments slide together and can be adjusted to provide maximum worker efficiency...least worker strain. Black baked polyester finish (boards natural, beige or white as shown). Max capacity 30 lbs.(13.5 kg), arm alone or arm and elbow together. Use of three or more arms or elbows on one mount reduces capacity and is not recommended. Swing arms, elbows and attachments include adjustable drag brakes. Installation hardware included with column mounts.

## ACCESSORIES

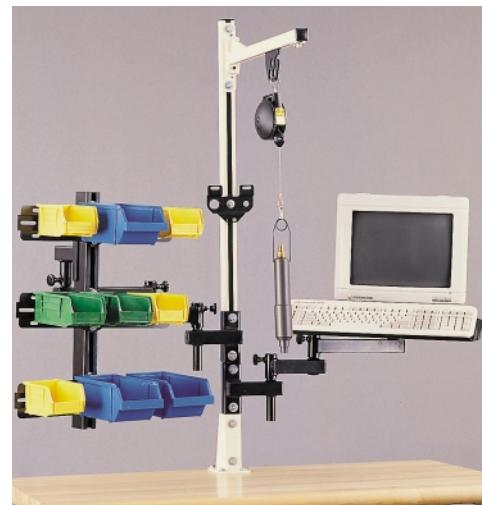

Single Column Kit shown with swing arms.  
Swing arms may also be used with  
dual column kits.

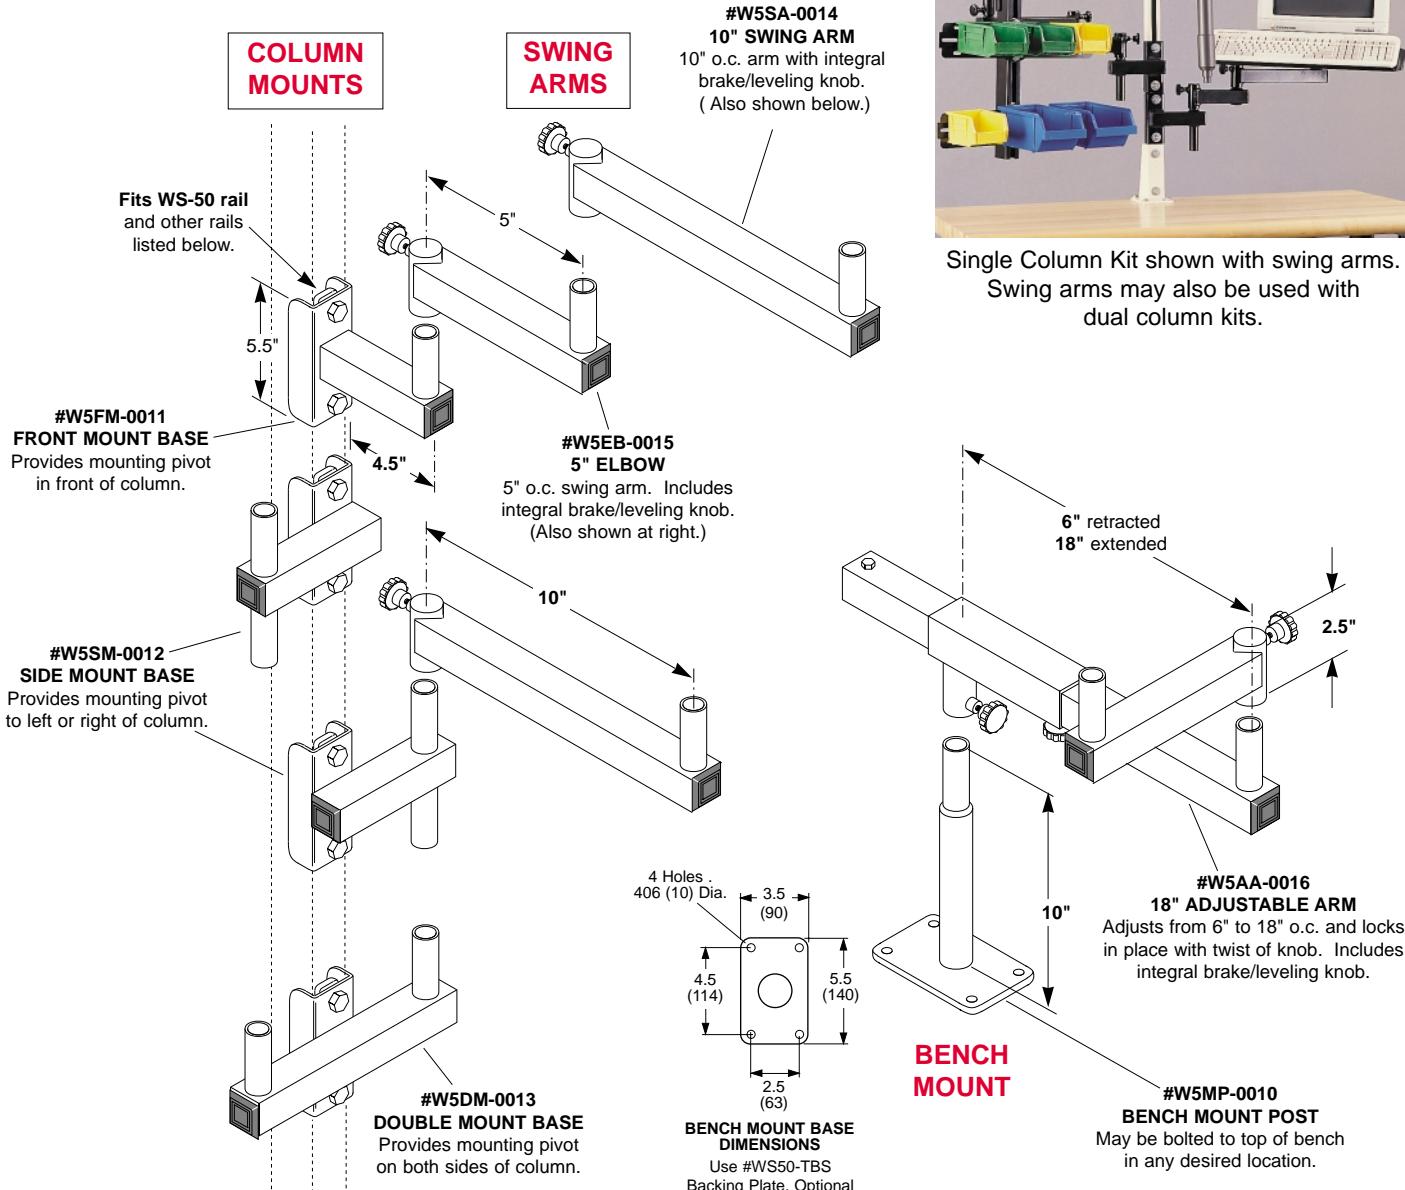

### BASES MOUNT TO COLUMNS MADE BY OTHERS

The wrap-around design of the column mounts allows affixing to a variety of commonly used vertical support rails with dimensions similar to our WS50 rail. The rails listed below will accept these mounting bases.

BRAND	RAIL TYPE	BRAND	RAIL TYPE
Aeromotive	See bewa	Econoline	WS50, WA50
Bee-Line <sup>®</sup>	B-22 & B-24	Kindorf <sup>®</sup>	B-905
bewa <sup>®</sup>	5400	Unistrut <sup>®</sup>	P-1000, P-3000
DuctoWire	FC-CH2A	Wampfler <sup>®</sup>	24-100

<sup>①</sup> This is a "construction" rail and does not provide a suitable surface for wheels.

<sup>②</sup> German product design

## ACCESSORIES





Workplace Solutions

# ADD ACCESSORIES TO YOUR KIT

## MAKE YOUR WORKSTATIONS DO ALL THEY CAN DO

Customize your workstations to fit the task and the worker. Attachments slide easily onto mounts or swing arms (previous page). Adjustable brake may be tightened to limit free movement. Frame available separately for holding your custom board. Components finished as shown below. All mounting hardware included. Complete kits, including arms, also available. See details below, right.

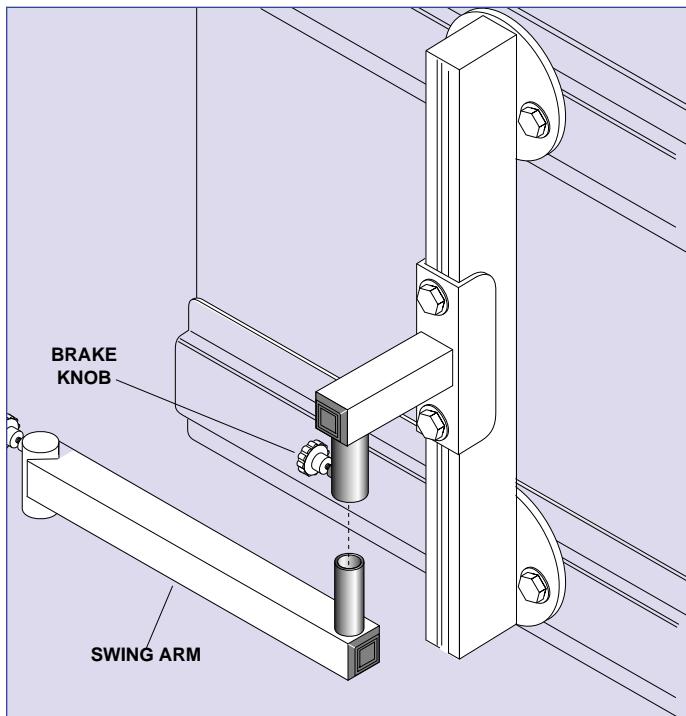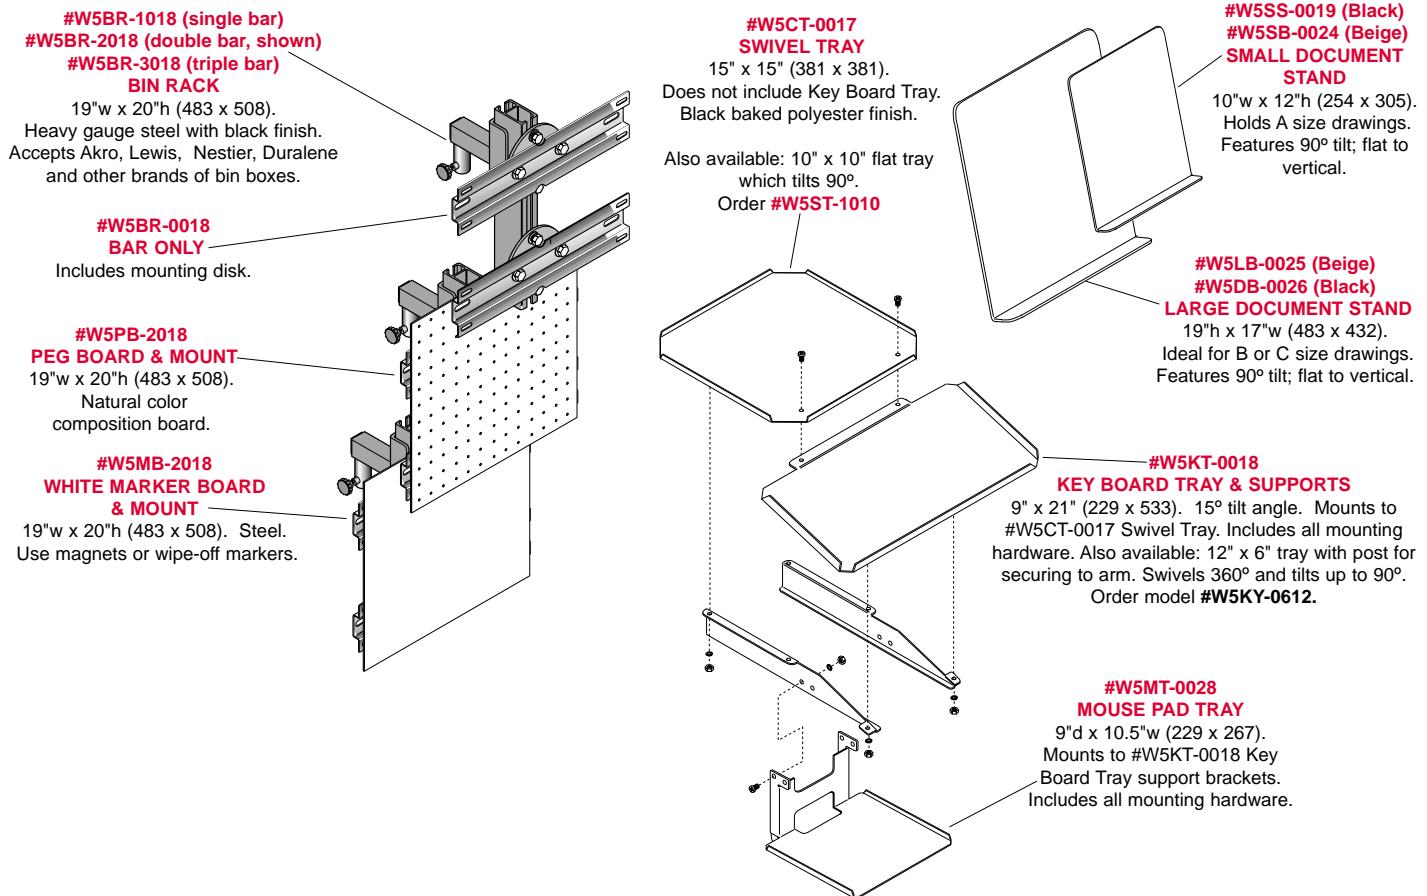

### UNIVERSAL MOUNTING SYSTEM

Attachments slide easily onto swing arm or base posts. No tools required.  
Knob locks attachment in place following adjustment.

### Kits-Include Base, Arms & Attachment

Easily fasten to vertical columns of Workstation. Each kit includes one 5" & one 10" arm plus mounting base and attachment shown. Rugged steel construction.  
All mounting hardware included.



Document Stand. 19" W x 17" H. 90° tilt,  
from flat to vertical.



Combo Computer, Keyboard & Mouse Tray.  
CPU tray 15" x 15"; Keyboard tray 9" x 21",  
tilts 20°. Mouse tray 9" D x 10.5" W.




Adjustable, See-thru Rack for Hanging  
Shelf Bins. 24" H x 18" W.  
(Accommodates Akro-Mils Akrobins™,  
as well as Gould Duralux™ bin boxes)

Description	Model Number
Document Stand	W5DS-SAK
Adjustable Bin Rack	W5BB-SAK
Combo Computer & Keyboard Tray	W5CK-SAK

# TORQ-ARM™ for ASSEMBLY TOOLS

## COMPLETE WORKSTATION KIT OR TORQ-ARM ONLY

Take a step towards OSHA Ergonomics standard compliance by fitting workstations with **Torq-Arm™** Torque Neutralizing arms. Available for either air or electric tools. Light weight anodized aluminum arms support weight of tool and allow easy positioning while preventing transmission of rotational forces to worker's hands or wrists. Units include tool balancer, telescoping positioning arms and rolling trolley for mounting in lateral tool rail on workstation or on bench mounted jib with swing boom (jib included). Electric tool models feature secure tool clamp which may also be used for electric or air powered pistol grip tool. Air tool models feature a U-joint manifold which supplies air to tool and allows vertical and horizontal tool positioning. **JIB MOUNTED TORQ-ARM™ KIT** includes all parts necessary for assembling a complete, ergonomically correct TORQ-ARM™ on an existing bench. Maximum torque rating is 15 foot pounds (20N.m). All steel parts protected with durable baked polyester finish. Order model for correct type and weight tool. Tools not included.

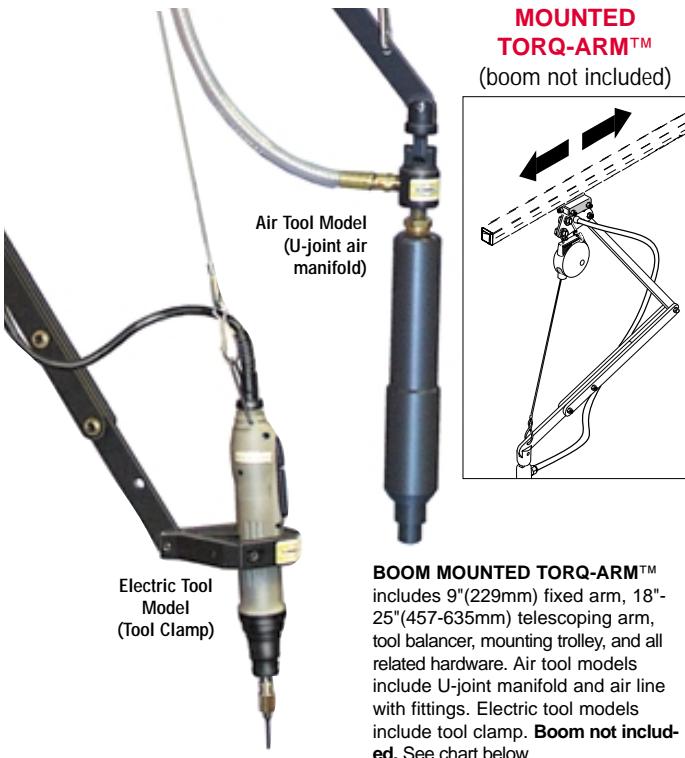

### TORQ-ARM™ ONLY-BOOM MOUNTED

Min.-Max. TOOL WEIGHT	TOOL TYPE	UNIT WEIGHT	MODEL NUMBER	
			WS30 boom	WS50 boom
0.5-1.5 lbs. (0.2-0.7 kg)	Air	5 lbs. (2.25 kg)	WS30-FA-1	WS50-FA-1
1.5-3.0 lbs. (0.7-1.4 kg)	Air	5 lbs. (2.25 kg)	WS30-FA-2	WS50-FA-2
3.0-5.0 lbs. (1.4-2.3 kg)	Air	5 lbs. (2.25 kg)	WS30-FA-5	WS50-FA-5
0.5-1.5 lbs. (0.2-0.7 kg)	Electric	5 lbs. (2.25 kg)	WS30-FE-1	WS50-FE-1
1.5-3.0 lbs. (0.7-1.4 kg)	Electric	5 lbs. (2.25 kg)	WS30-FE-2	WS50-FE-2
3.0-5.0 lbs. (1.4-2.3 kg)	Electric	5 lbs. (2.25 kg)	WS30-FE-5	WS50-FE-5

### RAIL MOUNTED TORQ-ARM™

Rail Not Included

Designed to be mounted on straight overhead tool rails. **Specify WS30 or WS50 rail.** See chart below. For optional swing lock, order #625288.

**OVERHEAD RAIL MOUNTED TORQ-ARM™** includes 9" (229mm) fixed arm, 18"-25" (457-635mm) telescoping arm, tool balancer, mounting trolley for WS30 or WS50 straight rail (check rail size before ordering), and all related hardware. Air tool models include U-joint manifold and air line with fittings. Electric tool models include tool clamp. Mounting rail and tool not included.

### TORQ-ARM™ ONLY-RAIL MOUNTED

MIN. - MAX. TOOL WEIGHT lbs. kg.	TOOL TYPE	UNIT WEIGHT lbs. kg.	MODEL NUMBER	
			WS30 RAIL	WS50 RAIL
0.5-1.5 (0.2-0.7)	Air	5 (2.3)	WS30-TA-1	WS50-TA-1
1.5-3.0 (0.7-1.4)	Air	5 (2.3)	WS30-TA-2	WS50-TA-2
3.0-5.0 (1.4-2.3)	Air	5 (2.3)	WS30-TA-5	WS50-TA-5
0.5-1.5 (0.2-0.7)	Electric	5 (2.3)	WS30-TE-1	WS50-TE-1
1.5-3.0 (0.7-1.4)	Electric	5 (2.3)	WS30-TE-2	WS50-TE-2
3.0-5.0 (1.4-2.3)	Electric	5 (2.3)	WS30-TE-5	WS50-TE-5


## ACCESSORIES



Workplace Solutions

### JIB MOUNTED TORQ-ARM™

(includes jib)




#WS50-TBS Backing Plate  
Optional. Recommended on  
wood or composite tops.



**BENCH MOUNTED TORQ-ARM™ JIB** includes (1) WS30 swing boom, (1) WS50 vertical column with base, (2) end caps, (1) end stop, hardware for mounting boom to column and column to base, and (1) TORQ-ARM™ kit including 9"(229mm) fixed arm, 18"-25"(457-635mm) telescoping arm, tool balancer, mounting trolley, and all related hardware. Air tool models include U-joint manifold and air line with fittings. Electric tool models include tool clamp.

### Torq-Arm mounted on Jib with Swing Boom. Mounts to bench top. Jib included.

Min.-Max. TOOL WEIGHT	TOOL TYPE	UNIT WEIGHT	MODEL NUMBER
0.5-1.5 lbs. (0.2-0.7 kg)	Air	20 lbs. (9 kg)	WS30-RA-1
1.0-2.5 lbs. (0.5-1.1 kg)	Air	20 lbs. (9 kg)	WS30-RA-2
2.0-5.0 lbs. (0.9-2.3 kg)	Air	20 lbs. (9 kg)	WS30-RA-5
0.5-1.5 lbs. (0.2-0.7 kg)	Electric	20 lbs. (9 kg)	WS30-RE-1
1.5-2.5 lbs. (0.5-1.1 kg)	Electric	20 lbs. (9 kg)	WS30-RE-2
2.5-5.0 lbs. (0.9-2.3kg)	Electric	20 lbs. (9 kg)	WS30-RE-5

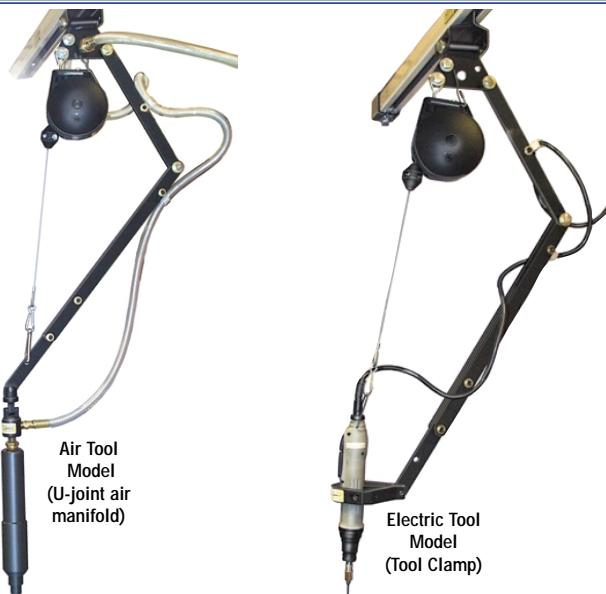




## NEUTRALIZE TORQUE...ELIMINATE TOOL LIFTING




Tool Positioners stop shock and torque transmission to wrists and arms, one of the major causes of musculoskeletal disorders (MSDs). Dual parallel arms also keep tool in a vertical position as it is moved across work area, eliminating need to lift or twist tool. Spring tension is adjustable for tools from 1.0–7.0 pounds. Air tools (AM models) attach directly to bottom of air manifold. Electric tools (EC models) clamp to adapter plate. **Choice of positioner mounting.** Post models mount to top of work surface...positioner is adjustable on 26" post (included). Column mounted positioners include adjustable bracket for attaching to workstation upright. Maximum torque rating is 97 inch pounds (11N.m).

- Reduces transmission of shock and torque to worker's hand, wrist or arm.
- Automatically positions tool perpendicular to work piece.
- Adjustable tension supports air or electric powered tools from 1.0–7.0 lbs.
- Arm reach: 15" minimum–30.5" maximum from base pivot point.

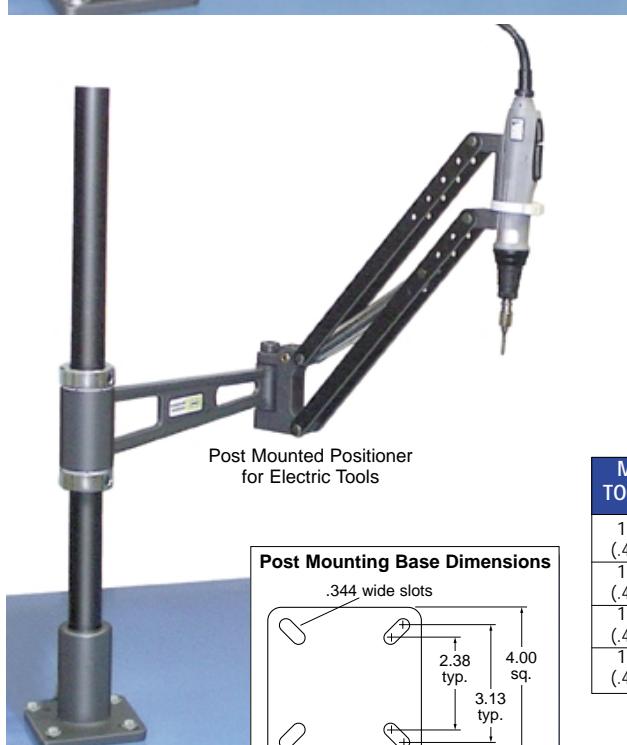

Min.-Max. TOOL WEIGHT	TOOL TYPE	MOUNTING TYPE	UNIT WEIGHT Lbs. (kg)	MODEL NUMBER
1.0 – 7.0 lbs. (.45 – 3.15 kg)	Air	Post (post included)	5 lbs. (2.25)	WSP-AM
1.0 – 7.0 lbs. (.45 – 3.15 kg)	Air	Column (bracket included)	5 lbs. (2.25)	WS50-AM
1.0 – 7.0 lbs. (.45 – 3.15 kg)	Electric	Post (post included)	5 lbs. (2.25)	WSP-EC
1.0 – 7.0 lbs. (.45 – 3.15 kg)	Electric	Column (bracket included)	5 lbs. (2.25)	WS50-EC



# 250 lb. CAPACITY RAIL

## FOR THOSE HEAVY DUTY APPLICATIONS

### ACCESSORIES




#### RAIL & HANGER KITS

Designed for large air tool balancers, these tool rail kits are similar to our W3F and W5F tool support kits but much heavier. Must be supported every 6 ft.(1.8m) minimum to maintain full rated capacity.

- The basic tool rail is the key component on which all accessories hang.
- Maximum 250 lb.(113kg) safe load rating.
- Galvanized for maximum corrosion protection.
- Available in 6, 12 and 18 ft. (1.8, 3.6, 5.4m) lengths.
- May be joined for any length.
- Can be mounted on walls, benches, floors, booms, or ceiling.

**250 lb. CAPACITY TOOL RAIL KIT** includes (1) galvanized steel rail (length per model), (1) heavy duty tool trolley, (2) hanger brackets, and (2) end stops.

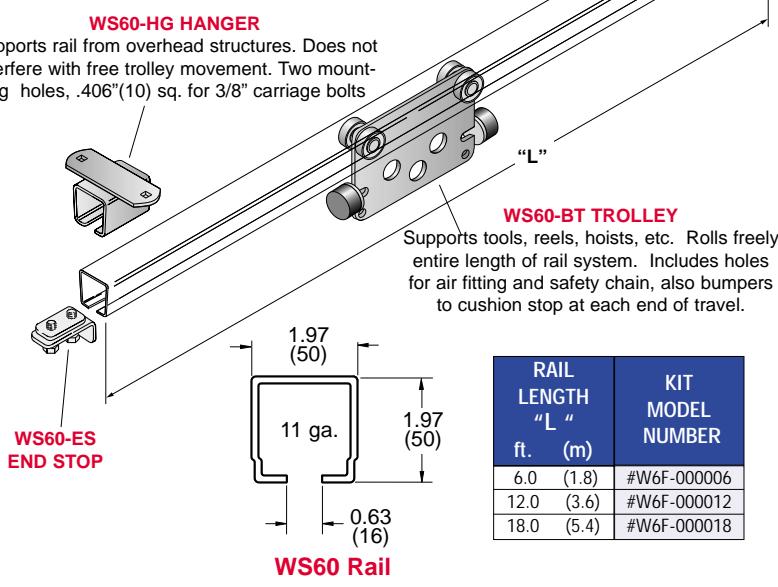

#### Heavy-Duty Hanger

Use components at right to hang Tool Rail from overhead supports


Hanging a tool rail from an overhead structure may be the best way to put a workstation where it's needed. 250 lb. capacity hangers, for use with WS60 steel track, are available as individual components only...not as kits. Thru bolts both top and bottom (see photo) act as a safety net. Thru bolts included with the mounting bases. Tool track must be supported every six feet to preserve 250 lb. capacity rating. Vertical C-60 supports must be field-cut to length to support rail at desired height.

DESCRIPTION	MODEL NO.
Mounting Base for C-60 Track	WS60-MB
C-60 Hanger Coupler	WS60-HC
Hardware Kit*	WS60-HW


\*Hardware Kit includes (4) 1/2 x 1 1/2 bolts, nuts, lock washers and flat washers required to attach hanger coupler to mounting base.



#### COMPONENTS

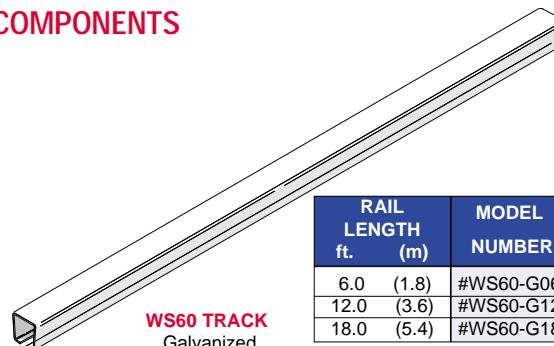

**WS60 TRACK**  
Galvanized  
USE: Horizontal supports, rail for lateral movement of tools, controls, hoists, etc; up to 250 lbs. (113 kg) maximum total load.



**#WS60-CP RAIL COUPLER**  
Zinc plated steel.  
USE: Joins track sections.




**#WS60-HG HANGER**  
Zinc plated steel.  
USE: Hangs/supports WS60 track from overhead beams, joists, or other structures.




**#WS60-HC HANGER/COUPLER**  
Zinc plated steel.  
USE: Joins track sections.




**#WS60-BT ROLLING TROLLEY**  
Black polyester finish.  
USE: Supports tools, balance reels, torque reels, push button control stations.

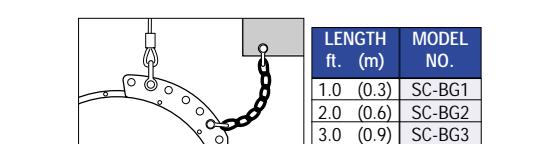

**SAFETY CHAIN**  
Strongly recommended, steel link chain prevents balancer or tool rail from accidental fall.  
Includes clevis both ends.

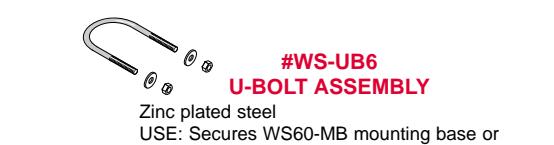

**#WS-UB6 U-BOLT ASSEMBLY**  
Zinc plated steel  
USE: Secures WS60-MB mounting base or other flat plates to 3" dia. vertical column

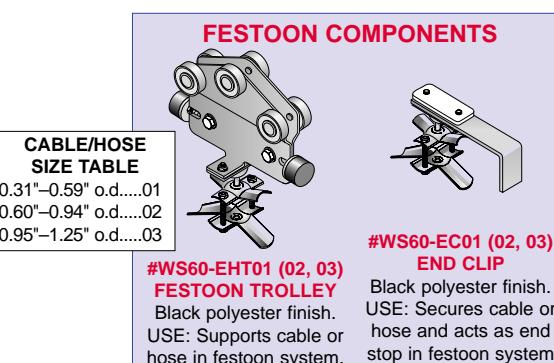

**CABLE/HOSE SIZE TABLE**  
0.31"-0.59" o.d.....01  
0.60"-0.94" o.d.....02  
0.95"-1.25" o.d.....03  
  
**#WS60-EHT01 (02, 03) FESTOON TROLLEY**  
Black polyester finish.  
USE: Supports cable or hose in festoon system.  
  
**#WS60-EC01 (02, 03) END CLIP**  
Black polyester finish.  
USE: Secures cable or hose and acts as end stop in festoon system.

## ACCESSORIES




# HEAVY DUTY TOOL CRANES


50 lb. or 250 lb. CAPACITY

Rugged bridge crane design concept allows overhead tool handling with maximum safety and minimum cost. Uses proven components rolling in standard WS-50 or WS-60 (steel) or WA-50 (aluminum) rails. 250 lb. capacity unit features doubled tool rail for maximum strength on spans over 6'. To speed installation, trolleys, hangers and tool track bridge are pre-assembled into single units, as is tool rail. Balance reel and tool not included.


### 50 lb. (22.5 kg) CAPACITY

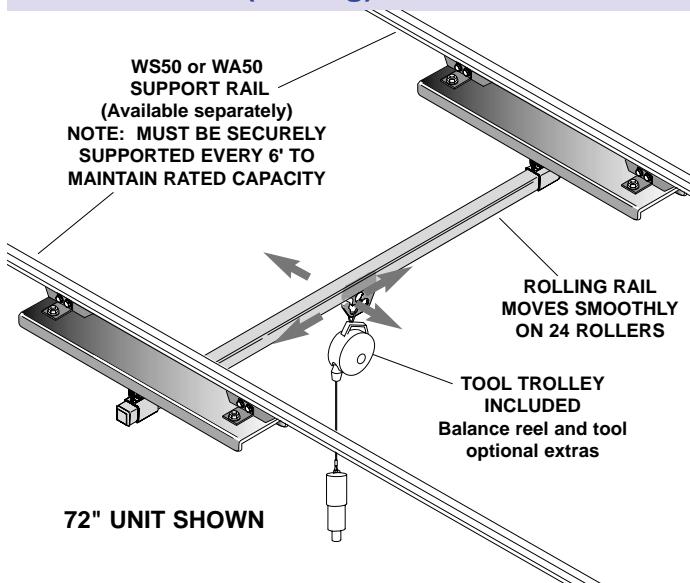


### 250 lb. (112.5 kg) CAPACITY

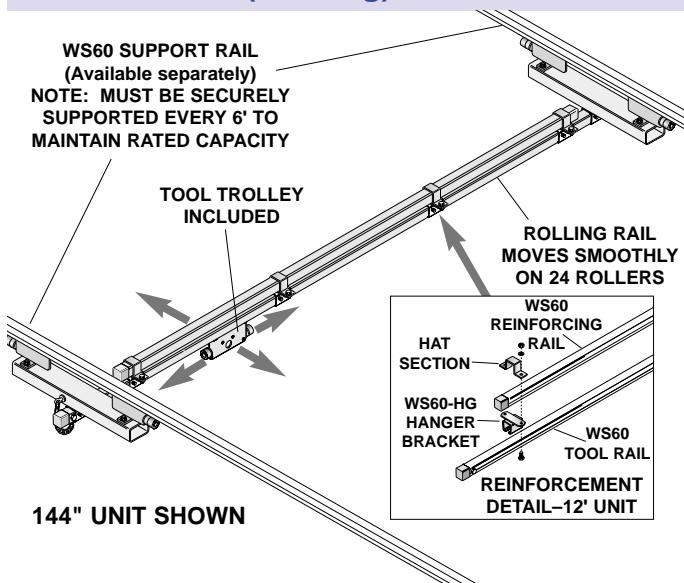

#### ASSEMBLY DETAILS

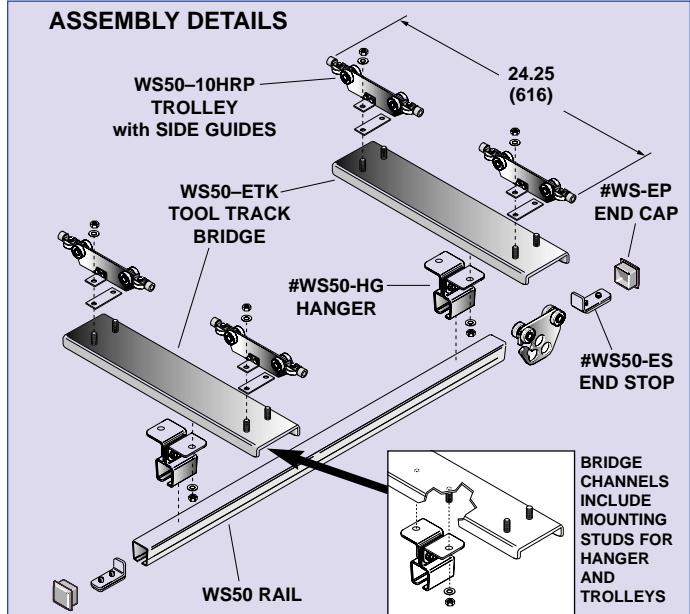

#### ASSEMBLY DETAILS

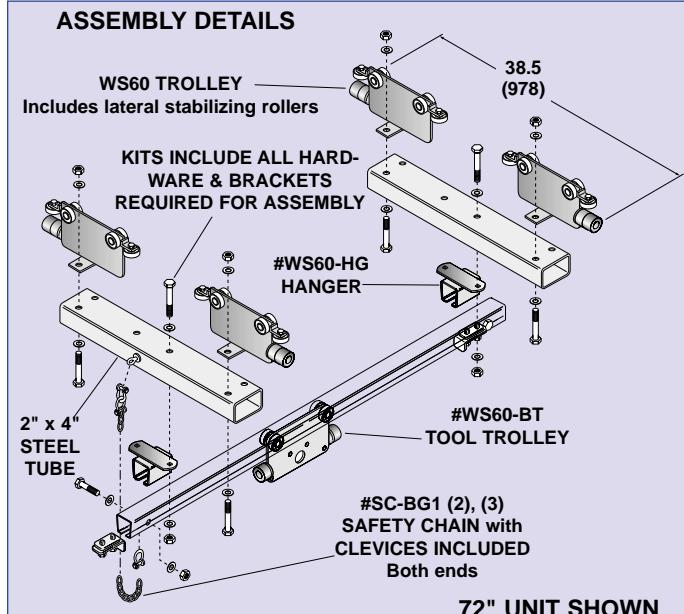

Heavy Duty Rolling Rail mounts in two parallel rails, which must be supported every 6' (1.8m) to maintain rated capacity. Recommended distance between support rails is length of tool rail less 12" (305mm). MAXIMUM RATED CAPACITY OF ROLLING RAIL includes tool, balancer, and attachments.

**50 lb. Capacity Rolling Tool Rail** includes (4) WS50-10HRP plain trolleys, (2) WS50-ETK tool track bridges, (2) WS50-HG hanger brackets, (1) WS50-BT tool trolley, (2) WS-EP end caps, (2) WS50-ES end stops, (1) WS50 tool rail (length per model) and all assembly hardware.




**250 lb. Capacity Rolling Tool Rail** includes (4) WS60-FT trolleys, (2) 2" x 4" steel tool track bridges, (2) WS60-HG hanger brackets, (1) WS60-BT tool trolley, (2) WS60-ES end stops, (1) WS60 tool rail (length per model), (1) WS60 reinforcing rail (144" unit only), (2) safety chains, assembly brackets and hardware.

#### MODEL CHART

DESCRIPTION in. (mm)	CAPACITY lbs (kg)	MODEL NUMBER
48" (1219) O.H. Tool Crane	50 (22.5)	WS50-ET04
60" (1524) O.H. Tool Crane	50 (22.5)	WS50-ET05
72" (1829) O.H. Tool Crane	50 (22.5)	WS50-ET06
108" (2743) O.H. Tool Crane	50 (22.5)	WS50-ET09
144" (3658) O.H. Tool Crane	50 (22.5)	WS50-ET12
72" (1829) O.H. Tool Crane	250 (112.5)	WS60-ET06
144" (3658) O.H. Tool Crane	250 (112.5)	WS60-ET12

**NOTE:** For best results, tool rail width should not exceed six times trolley wheelbase. Example: 24"(2 ft.) x 6 = 12 ft.

**Jib** kits feature either fixed or swing booms mounted on vertical columns. The boom may be adjusted vertically higher or lower on the column to suit your specific application. Vertical columns are typically 4 ft.(1.2m) for bench mounting and 7 ft.(2.1m) for mounting on the floor. If floor mounted, the optional support clamp (WS50-SC) fastened to wall or back of bench is recommended.

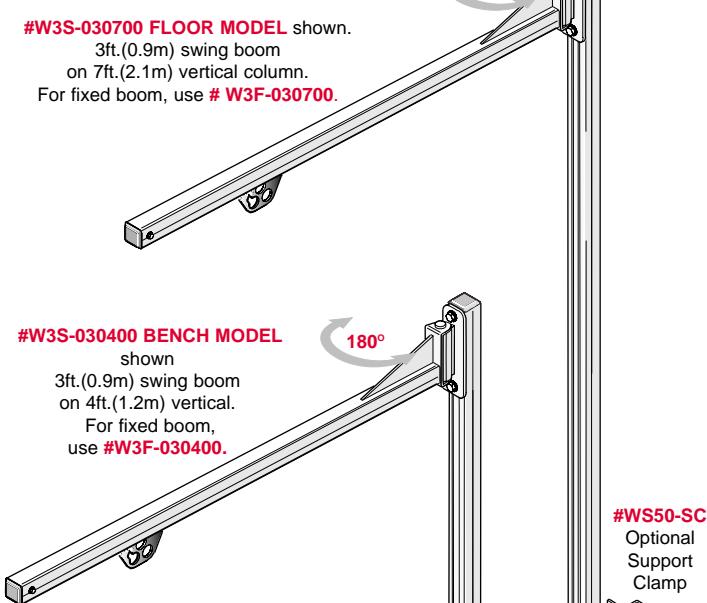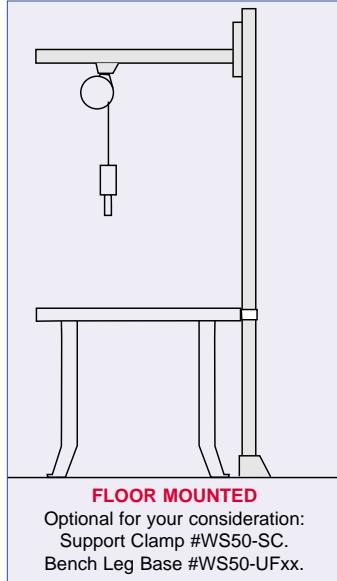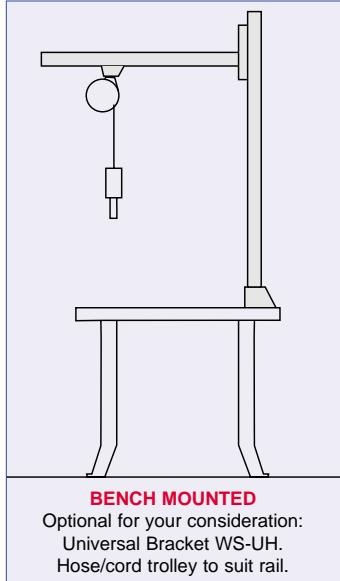


**JIB KITS** with **W3F** or **W3S** prefix include (1) 3' **WS30** boom, (1) **WS50** vertical column, (1) mounting base, (2) end caps, (1) end stop, (1) balancer trolley, and all hardware. Fixed booms are mounted to the vertical columns with angle brackets, also included.

**ALL KITS** include hardware needed for assembly. Fasteners for mounting base to bench top or floor not included.


Sizes and configurations other than those shown may be made-up by ordering individual components. Refer to other pages in this catalog.

**WS30 Rail for loads up to 30 lbs.(13.5 kg)**

BOOM LENGTH ft. (m)	BOOM TYPE	VERTICAL COLUMN	MODEL NO.
3.0 (0.9)	Swing	4.0 (1.2)	#W3S-030400
3.0 (0.9)	Fixed	4.0 (1.2)	#W3F-030400
3.0 (0.9)	Swing	7.0 (2.1)	#W3S-030700
3.0 (0.9)	Fixed	7.0 (2.1)	#W3F-030700




**WS50-TB MOUNTING BASE INCLUDED**  
Use Optional #WS50-TBS Backing Plate



**WS50-MB MOUNTING BASE INCLUDED**  
Use Optional #WS50-MBS Backing Plate

## FLOOR MOUNTED, 50 lb.-300 lb. CAPACITY, 6'-18' BOOMS

**Jib Kits** feature heavy duty I-beam booms or C-rail booms. Vertical columns include pre-drilled, gusseted mounting bases. 50 lb. capacity kits are available with either fixed or swing booms up to 18'(5.4m) long. Columns available to 10'(3m) high. Booms may be mounted higher or lower on the column to suit your specific application. 150 lb. capacity kits have swing booms up to 10'(3m) long. Columns are 10'(3m) high. Booms on 150 lb. and 300 lb. capacity jibs are mounted to top of column with tapered bearing and heavy-duty rollers allowing full 360° swing. Vertical columns for 50 lb. capacity jibs also available separately.

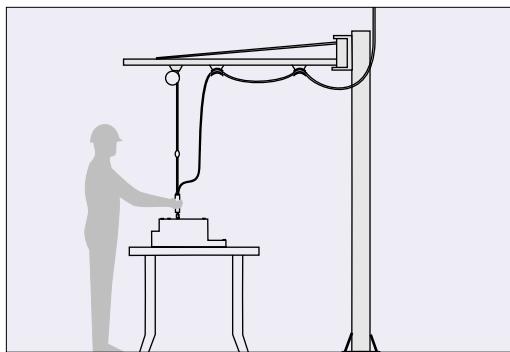

**JIB KITS** include (1) boom, (1) vertical column with integral mounting base, and assembly hardware. **Does not include END CLIP #WS-EC.** Order End Clip separately.

**KIT NUMBERS** assume festoon trolleys for typical 3/8"(9mm) I.D. hose with saddle to handle O.D. range of 0.60"-0.94"(15-24mm). If optional saddle with range of 0.31"- 0.59"(8-15mm) is desired, substitute "1" for "2" as last digit of model number. Example: W5S-060301

**\* STOPS TO LIMIT BOOM SWING**

Manual Boom Stop -50 lb. Jibs...**Model # W5S-SK.**  
Spring Loaded Boom Lock-50 lb. Jibs...**#W5S-BMLK.**  
Boom Stops-150 lb. & 300 lb. Jibs...**Model #W6S-SK**  
#W5S-SK & #W6S-SK consist of two machined steel stops (one for each direction) and all required hardware.  
#W5S-BMLK includes spring loaded lock, brackets and all hardware. All field installed only.

**MODEL CHART-HEAVY DUTY JIBS**

Booms are WS50 rail for loads up to **50 lbs.** (22.5kg). Vertical columns are 3"O.D. x 2.5" I.D. (76mm x 64mm) welded steel tubing. Vertical column for 18' boom is 6" square steel tube with 3" dia. x 2' mounting shaft at top.

BOOM LENGTH ft. (m)	TYPE	VERTICAL COLUMN ft. (m)	MODEL NO.
6.0 (1.8)	Fixed	3.0 (0.9)	#W5F-060302
6.0 (1.8)	Swing	3.0 (0.9)	#W5S-060302
10.0 (3.0)	Fixed	3.0 (0.9)	#W5F-100302
10.0 (3.0)	Swing	3.0 (0.9)	#W5S-100302
6.0 (1.8)	Fixed	7.0 (2.1)	#W5F-060702
6.0 (1.8)	Swing	7.0 (2.1)	#W5S-060702
10.0 (3.0)	Fixed	7.0 (2.1)	#W5F-100702
10.0 (3.0)	Swing	7.0 (2.1)	#W5S-100702
6.0 (1.8)	Fixed	9.0 (2.7)	#W5F-060902
6.0 (1.8)	Swing	9.0 (2.7)	#W5S-060902
10.0 (3.0)	Fixed	9.0 (2.7)	#W5F-100902
10.0 (3.0)	Swing	9.0 (2.7)	#W5S-100902
18.0 (5.4)	Swing	12.0 (3.6)	#W5S-181002
*Swing Stop Kit (50 lb. jibs only)		#W5S-SK	
*Boom Lock Kit (50 lb. jibs only)		#W5S-BMLK	

**150 lbs.(67.5kg) capacity Jib.**

Boom is WS60 rail. Column is 4" schedule 40 steel pipe.

6.0 (3.0)	360° Swing	10.0 (3.0)	#W15S-100600
8.0 (3.0)	360° Swing	10.0 (3.0)	#W15S-100800
10.0 (3.0)	360° Swing	10.0 (3.0)	#W15S-101000

\* Full Rotation Stops


#W6S-SK

**300 lbs.(135kg) capacity Jib.**




Boom is 3" I-beam. Vertical column is 6"(152mm) schedule 40 steel pipe.

10.0 (3.0)	Pneumatic	10.0 (3.0)	#W6S-101002
10.0 (3.0)	Electric	10.0 (3.0)	#W6S-101002-430
I-Beam Trolley only - Fits 3"(76) I-beam			#W6S-BT
* Full Rotation Stops			W6S-SK


**W6S-101002 300 lb. Jib**  
with Swivel Air Fitting

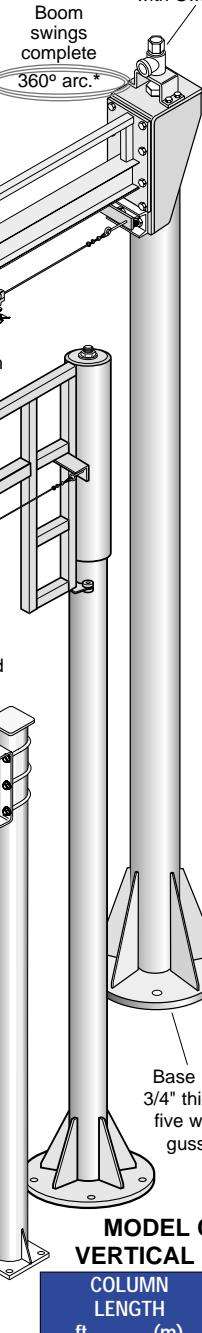

**Column Only**  
See Model Chart below  
WS00-VCS10 Shown

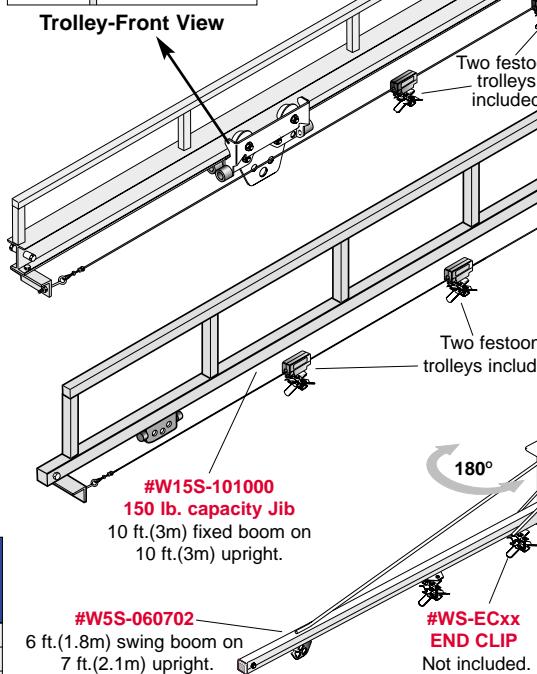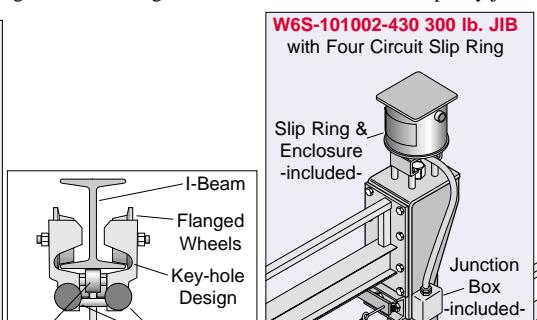


**#W15S-101000**  
150 lb. capacity Jib  
10 ft.(3m) fixed boom on  
10 ft.(3m) upright.

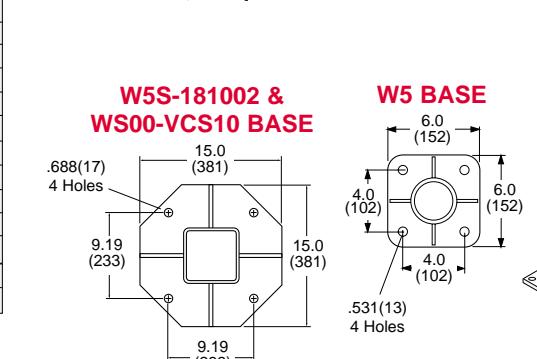


**#W5S-060702**  
6 ft.(1.8m) swing boom on  
7 ft.(2.1m) upright.

**#WS-ECxx**  
END CLIP  
Not included.

**W5S-181002 &**  
**WS00-VCS10 BASE**



**W5 BASE**




**MODEL CHART-  
VERTICAL COLUMNS**

COLUMN LENGTH ft. (m)	MODEL NUMBER
3.0 (0.9)	#WS00-VC03
5.0 (1.5)	#WS00-VC05
6.0 (1.8)	#WS00-VC06
7.0 (2.1)	#WS00-VC07
8.0 (2.4)	#WS00-VC08
9.0 (2.7)	#WS00-VC09
10.0 (3.0)	#WS00-VC10
11.0 (3.3)	#WS00-VC11
12.0 (3.6)	#WS00-VC12

**Column for W5S-181002.**

May be used with any  
50 lb. capacity boom.

12.0 (3.6)	#WS00-VCS10
------------	-------------

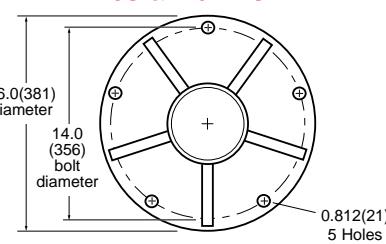

# CEILING MOUNTED JIB KITS


## SWING BOOM STOPS

JIBS



Workplace Solutions

Hanging a jib from an overhead structure may be the best way to put a workstation where it's needed. These kits free floor space and allow for greater plant layout flexibility. Jibs have steel WS50 booms in length shown. Vertical columns include a heavy duty 3ft.(0.9m) safety chain at the top and safety plate at the bottom to prevent boom from sliding off.

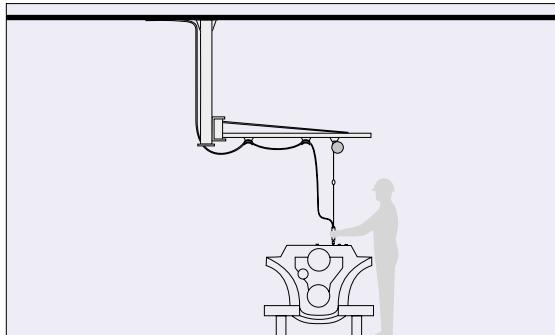

**CEILING MOUNTED JIB KIT** includes 6 ft.(1.8m) swing boom, vertical column with integral safety chain and safety plate, 3 U-bolts, 1 balancer trolley, 1 hose/cable trolley for festoon, 1 end stop and 1 end cap.

**CEILING MOUNTED COLUMNS** do not include booms but do include safety plate and integral safety chain.

**BOOM AND TROLLEY DETAILS:** see back page. Sizes and configurations other than those shown may be made-up by ordering individual components.

**KIT NUMBERS** listed assume typical 3/8" (9mm) I.D. hose with saddle to handle O.D. range of 0.60"-0.94" (15-24mm). If optional saddle with O.D. range of 0.31"-0.59" (8-15mm) is desired, substitute "1" for "2" as last digit of model number. Example: WCS-060301.

**WS50 Rail Booms for loads up to 50 lbs.(22.5kg)**

Vertical columns are 3"O.D. x 2.5" I.D. (76 x 64mm)  
welded steel tubing.

BOOM LENGTH ft. (m)	BOOM TYPE	VERTICAL COLUMN ft. (m)	W/BOOM	W/O BOOM
			MODEL No.	MODEL No.
6 (1.8)	Swing	3 (0.9)	#WCS-060302	#WS00-CC03
6 (1.8)	Swing	5 (1.5)	#WCS-060502	#WS00-CC05
6 (1.8)	Swing	6 (1.8)	#WCS-060602	#WS00-CC06
6 (1.8)	Swing	7 (2.1)	#WCS-060702	#WS00-CC07
6 (1.8)	Swing	8 (2.4)	#WCS-060802	#WS00-CC08
6 (1.8)	Swing	9 (2.7)	#WCS-060902	#WS00-CC09


MOUNTING PLATE-12" x 96" (304 x 2438) #WSCB-096

MOUNTING PLATE-12" x 120" (304 x 3048) #WSCB-120

### #WSCB-096 & WSCB-120

#### Mounting Plate

Optional. Attaches to ceiling cross members for mounting jib to ceiling structures. Pre-drilled in three places to match jib base.

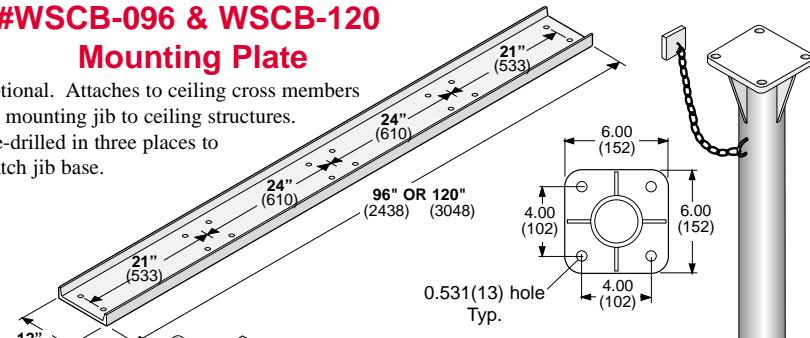


#### WCS-060902

6 ft.(1.8m) swing boom on 9 ft.(2.7m) column. Other models available with 3 ft. to 8 ft. (0.9-2.4m) columns. See chart below.

#### Ceiling Mounted Columns

Rugged 3.0" O.D. x 2.5" I.D. (76 x 64mm) welded steel tube. Beige polyester finish. Includes integral mounting base and 3' (0.9m) safety chain. Plate at bottom prevents equipment mounted on column from sliding off. Mounting hardware not included.

USE: Supports tool rail booms or horizontal support members. Gets booms and tools up and out of the way, freeing floor space.

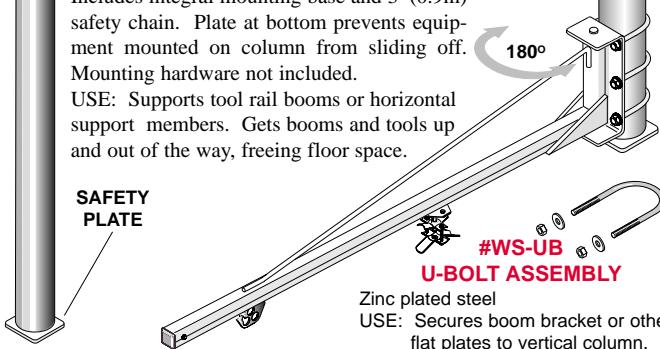

#### #WS-UB U-BOLT ASSEMBLY

Zinc plated steel  
USE: Secures boom bracket or other flat plates to vertical column.  
NOTE: Three required to mount boom.

#### CAUTION

Inverted jibs and related equipment must be installed with adequate safety features, such as a secondary Safety Chain and a Plate which prevents boom from sliding off bottom of column (included with each kit). Jib is designed to support tool and items associated with tool operation only. Jib must not be used to support anything over the stated 50 lbs(22.5kg) weight limit. **It is the installer's responsibility to provide required safety items to meet local codes and to install each unit with maximum attention to safe work practices.**

## Swing Stops for 50 lb. capacity Booms

Many people want the flexibility a swing boom provides but need to limit swing in one or both directions. Two boom stops are available. One (below) has manually positioned (screw-in) stops that limit swing to 15°, 30°, 45°, or 60° in either direction. The other (left) has a spring loaded stop that, when pulled, allows the boom to swing freely throughout its normal 180° arc and, when released, lock it at the straight position or every 15° in either direction. Stops are easily installed on 50 lb. capacity swing booms without drilling or welding.




**Manual Swing Boom Stop:**  
W5S-SK

**Spring Loaded Boom Lock:**  
W5S-BMLK

## Swing Stop for 300 lb. Capacity Jib

When less than a full 360° swivel is desired on the 300 lb. capacity jib, add the Model W6S-SK stops. Kit consists of two machined steel stops (one for each direction) and all required hardware. Stops are RED for visibility.

#### Model W6S-SK

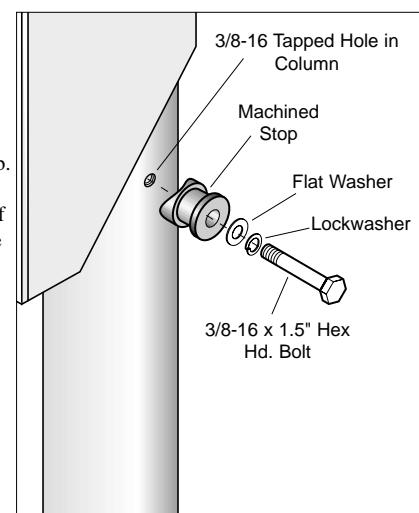

## ACCESSORIES




Workplace Solutions

## RETRIEVERS

### REELS FOR PULLING & TUGGING VARIOUS LOADS

**RETRIEVERS** are designed to provide a "constant" pulling force over a specified distance. Working length (in feet) and pull (in pounds) shown in chart below. Reels feature rugged steel construction with polyester baked finish and rigid mounting bracket. Spring is permanently lubricated. Cable is 920 lb.(414kg) test 0.09"(2.3mm) dia. 7 x 7 strand galvanized steel aircraft cable nylon covered to 0.12"(3.0mm) O.D. Reels include end clip and adjustable cable stop. Net weight of all models 10 lbs.(4.5kg).

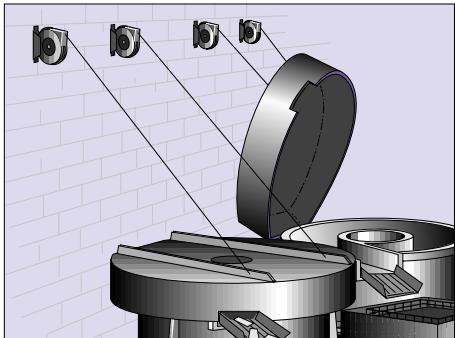


Sound dampening covers on vibrating cleaners make sound level in a metal finishing plant more acceptable. Two RETRIEVERS lift part of each cover's weight and make opening easier and safer.



RETRIEVER keeps fork truck charging cables out of the way when not in use, reducing damage and need for costly replacement. Mount retriever on wall, as shown here, or directly on charger.

#### APPLICATION


RETRIEVER REELS are available in two mounting types: (A) with pull parallel to mounting surface. (B) with pull perpendicular to mount. Choose type which provides payout in direct line to attachment.




#### DIMENSIONS

ALL DIMENSIONS IN INCHES (mm)


##### "A" MOUNT-SERIES TQR



##### "B" MOUNT-SERIES TQV



#### WORKING LENGTH CHART

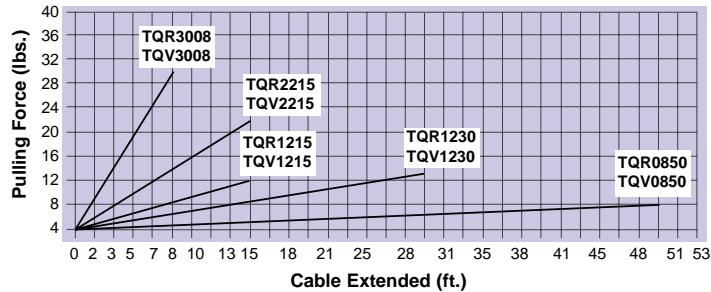

#### SELECTION CHART

CABLE LENGTH* ft. (m.)	MINIMUM PULL** lbs. (kg)	MAXIMUM PULL** lbs. (kg)	MODEL NO. "A" MOUNT	MODEL NO. "B" MOUNT
50 (15.0)	0.5 (0.2)	7.5 (3.4)	TQR0850	TQV0850
15 (4.5)	3.0 (1.4)	12.0 (5.4)	TQR1215	TQV1215
30 (9.0)	3.0 (1.4)	12.0 (5.4)	TQR1230	TQV1230
15 (4.5)	7.5 (3.4)	22.0 (9.9)	TQR2215	TQV2215
8 (2.4)	8.0 (3.6)	30.0 (13.5)	TQR3008	TQV3008

\*Cable lengths listed are for "active" or "working" cable. Includes end clip and cable stop.

\*\*Pulling forces above are approximate and depend on exact spring adjustment or pre-tensioning by the user. Reels are pre-set at the factory at the minimum pull. Adjusting reel to suit application is user's responsibility.

## Modular Design, Maximum Flexibility Packaging Workstation

Speed your shipments out the door. Shipping station kit was designed with utility and flexibility in mind. Strong, light weight extruded aluminum frame with steel joining brackets and maple bench tops may be assembled in a variety of configurations to fit your space and job requirements. Adjustable light with two 48" fluorescent lamps, packaging foam dispenser with cutting bar, adjustable shelf, power strip and swing arm mounted monitor and printer trays are included as standard. Unique wire trough on back helps organize and protect sensitive computer cables, power cords, etc. Station measures 120" long x 32.5" deep x 87" high in configuration shown. All metal parts have durable polyester finish. Aluminum is beige, steel brackets are matte black. All hardware is zinc plated steel.

DESCRIPTION	MODEL NO.
30" deep Packaging Workstation	HWS-STA120



# MINIMIZE REACHING FOR PARTS

## SOLVE PARTS LOGISTICS PROBLEMS

Here are three ways to supply small parts to the workstation in an ergonomically friendly manner. Properly positioned parts bins at assembly points minimize stretching and reaching which can lead to MSDs. These carts are also great at temporary job task locations.

### MOBILE KITS



### Place 'n Pick SHELF CART

Complete kits with three 12"(305mm) deep adjustable shelves are available in 30"(762mm), 42"(1067mm), 54"(1372mm), or 66"(1676mm) widths. Or, if you want to build a custom cart, frame kits allow you to install 12"(305mm) or 18"(457mm) deep shelves and other accessories like Bin Bars on which to hang bins, electric power strips or air manifolds, even swing arms (see workstation accessory page in this catalog). Maximum capacity 50 lbs.(22.5 kg) per shelf.

Cart kits include three 12"(305mm) deep x 30"(762mm), 42"(1067mm), 54"(1372mm) or 66"(1676mm) wide

steel shelves, sturdy extruded aluminum frame, steel construction brackets, and all hardware. Aluminum frame members and shelves have beige baked polyester finish. Steel brackets, including shelf brackets, are black. Also included are four heavy-duty locking casters, and black end caps.

Shelf cart easily handles box bins of various sizes. Bins (not included) may be loaded onto shelves from rear.



### Rolling Bin Rack

Hang bin boxes on both sides, position cart in the best place for greatest workplace efficiency and ergonomics. Move easily if task or worker changes. Six bin supports may be positioned at desired heights. Bin boxes not included.



- Sturdy extruded aluminum frame with heavy-duty steel brackets.
- Includes six bars for holding bin boxes
- Four locking, swivel casters.
- 300 lb. max capacity.

Dimensions:  
77"H x 36"D x 33.6" wide

### Gravity Feed Rack

Semi-permanent (adjustable glides, not casters) designed for supplying parts bins to work areas. Two conveyor levels, each featuring four roller strips, fully adjustable slope and height. sturdy steel stops prevent bin run-off. Roller strips supported along entire length by WS30 rail.



- Sturdy extruded aluminum frame with heavy-duty steel brackets.
- Adjustable glides, not casters.
- 300 lb. max capacity.

Dimensions:  
62"H x 36"D x 30" wide


### SHELF CART KIT & COMPONENT LISTING

DESCRIPTION	MODEL NO.
Complete Cart Kit-(3) 12"D x 30"W Shelves included	HWP-SC30
Complete Cart Kit-(3) 12"D x 42"W Shelves included	HWP-SC42
Complete Cart Kit-(3) 12"D x 54"W Shelves included	HWP-SC54
Complete Cart Kit-(3) 12"D x 66"W Shelves included	HWP-SC66
INDIVIDUAL COMPONENTS	
Frame Kit*-For 30" Wide Shelves	HWP-SC03
Frame Kit*-For 42" Wide Shelves	HWP-SC04
Frame Kit*-For 54" Wide Shelves	HWP-SC05
Frame Kit*-For 66" Wide Shelves	HWP-SC06
Shelf-12"D x 30"W	WS50-SS03
Shelf-12"D x 42"W	WS50-SS04
Shelf-12"D x 54"W	WS50-SS05
Shelf-12"D x 66"W	WS50-SS06
Shelf-18"D x 30"W	WS50-SS183
Shelf-18"D x 42"W	WS50-SS184
Shelf-18"D x 54"W	WS50-SS185
Shelf-18"D x 66"W	WS50-SS186

\*Frame kits include aluminum and steel members, four locking casters, end caps and all assembly hardware. Width shown is inside-to-inside dimension. Shelves fit inside frame uprights. Shelves that hang in front of uprights are available. See page 9 for details on shelves and other accessories that can be easily installed on frame.

### Supply 'n Return™ Gravity Feed Cart

Three adjustable conveyors supply full bins to assembly area and return empty bins to aisle. Each level may be easily adjusted for optimum slope and spacing. May also be assembled with all three levels sloped toward work area.. Adjustable safety yellow bin stops also protect ends of conveyors. Tough baked polyester finish. Optional adjustable side guides (not shown) may be added to keep bins aligned. Bins not included.



- Sturdy extruded aluminum frame with heavy-duty steel brackets.
- 18 adjustable roller strips.
- 300 lb. max capacity.
- Locking, swivel casters

Dimensions:  
48"H x 48"D x 47"W

Model Description	Number
Supply 'n Return Cart	HWP-GF444
Side Guides (set of two)	HWP-SG4


### Push 'n Place™ WORKSTATION

Here's a way to maintain flexibility on the plant floor without sacrificing safety and productivity. The Hubbell Workplace Solutions Push 'n Place portable workstation rolls easily on four heavy-duty locking, swivel casters. Constructed of strong extruded aluminum rail, it measures 36" deep and 90" high, including casters.



Frame is 44" wide o.c., perfect for under a 5' conveyor section or 60" bench. Tool bar is 60" long and can be fitted with splice angles to adjoin two or more units. Bin Bar, air manifold and balancer trolley with fitting plus 3/8" hose are standard. Frame is finished with beige baked polyester. Brackets are matte black. Assembly required.

**NOTE:**  
Standard Hubbell Workplace Solutions swing arms and other accessories may be used with this portable workstation.

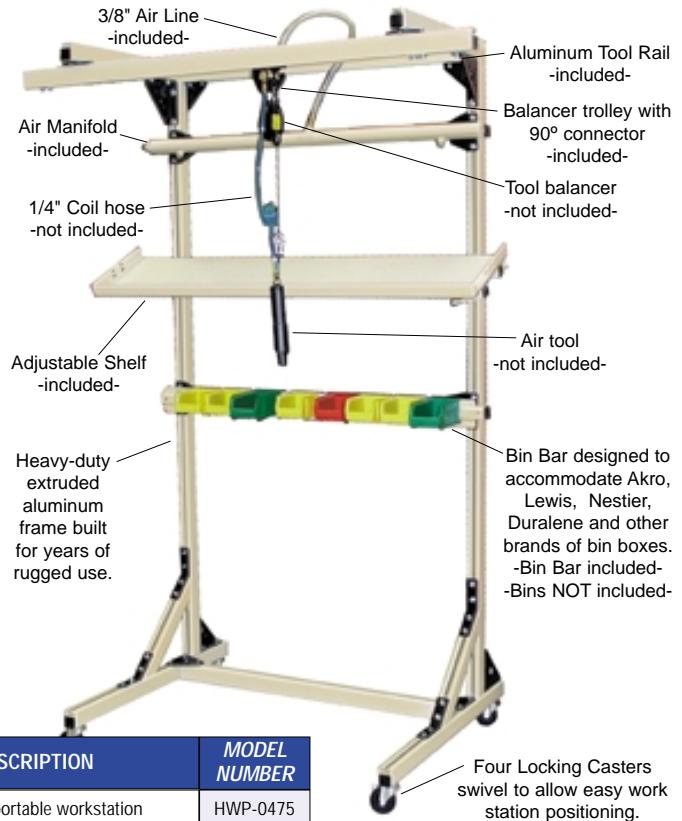

DESCRIPTION	MODEL NUMBER
Push 'n Place portable workstation	HWP-0475

### WIRE SPOOL CART

Here's the answer to production or maintenance wiring jobs. Roll the wire to the job, unspool what you need, and return the cart to a convenient storage place. **WA50** aluminum rail with formed steel brackets, cart measures 54" high, 36" deep and 33.6" wide with a 27" clear space between spool shaft brackets, which are fully adjustable. Available with four heavy-duty casters (two fixed and two swivel with locks), two fixed casters and two glides or, for semi-permanent installation, with four glides. Swivel casters may be installed at either front or back. All components, except hardware, finished with chip-resistant baked polyester coating. Rails are beige and brackets are black. Assembly required.

**MAXIMUM CAPACITY: 300 lbs.**




#### OPTIONAL GLIDES

DESCRIPTION	MODEL NUMBER
Wire spool cart with four casters.	HWP-RC01
Wire spool cart with four glides.	HWP-RC02
Wire spool cart with two fixed casters and & glides.	HWP-RC03

### MOBILE TEST STATION

The model HWP-TC01 Test Bed Cart represents the ultimate in versatility. Dual support rails adjust to any size electrical box. Box mounts easily with exclusive **K-Z NUT™** Trak Nuts, furnished. Two coil hangers keep cable off floor while cart is being rolled to the job. Heavy duty shelf easily supports even the heaviest technical manuals. Bin Bar holds box bins for miscellaneous storage. Frame is strong extruded aluminum with beige baked polyester finish. All joining brackets are heavy steel with matte black polyester. Includes four locking, swivel casters and all assembly hardware. Bin boxes, electrical box and cables not included. Some assembly required.

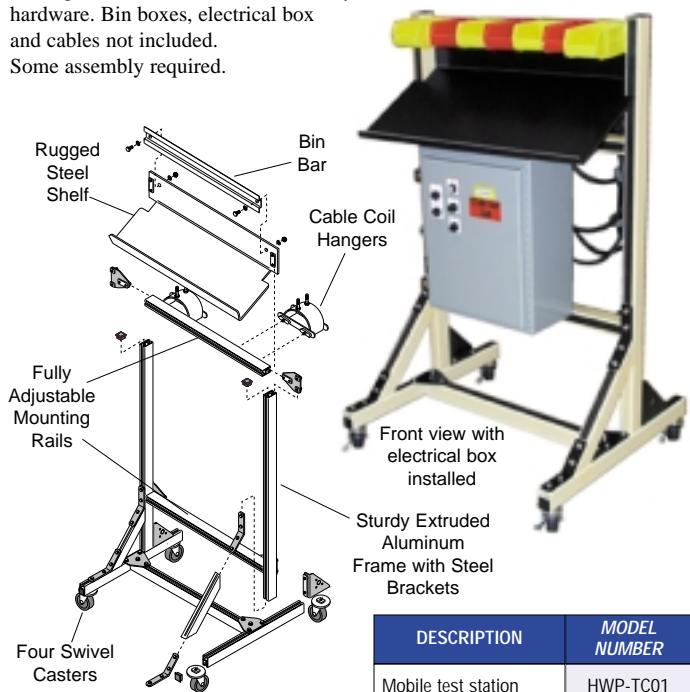


DESCRIPTION	MODEL NUMBER
Mobile test station	HWP-TC01

# ALUMINUM TRACK COMPONENTS

ADD TO...OR BUILD YOUR OWN DESIGN

For loads up to 50 lbs.(22.5 kg)

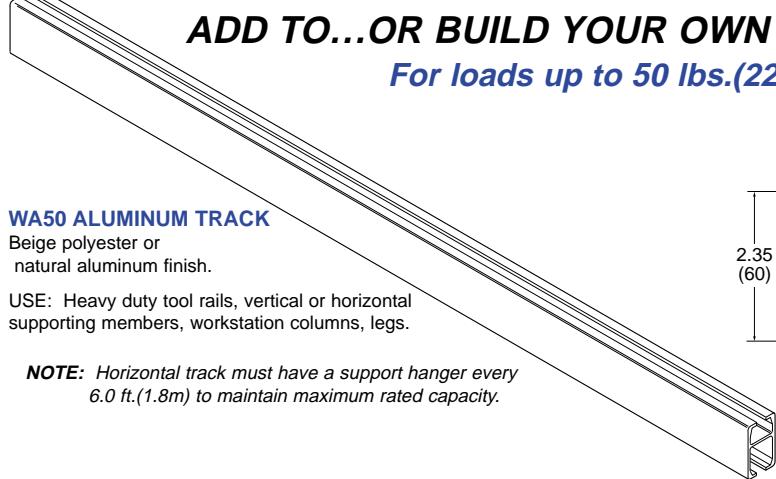


## WA50 ALUMINUM TRACK

Beige polyester or natural aluminum finish.

USE: Heavy duty tool rails, vertical or horizontal supporting members, workstation columns, legs.


**NOTE:** Horizontal track must have a support hanger every 6.0 ft.(1.8m) to maintain maximum rated capacity.



RAIL LENGTH ft. in. (m)	BEIGE MODEL NO.	NATURAL MODEL NO.
2' 5" (0.8)	#WA50-T029	#WA50-N029
3' 0" (0.9)	#WA50-T036	#WA50-N036
4' 0" (1.2)	#WA50-T048	#WA50-N048
5' 0" (1.5)	#WA50-T060	#WA50-N060
6' 0" (1.8)	#WA50-T072	#WA50-N072
7' 0" (2.1)	#WA50-T084	#WA50-N084
20' 0" (6.1)	n/a	#WA50-N240
45° ANGLE BRACE 1' 5" (0.4)	#WA50-TB17	#WA50-NB17

Consult factory for lengths not shown above.

Extruded aluminum rail features double tracks (top and bottom), one for trolleys and the other for mounting components or concealing hose or cable. Inside dimensions of the **larger track is same as WS50 steel rail** and fits standard WS50 trolleys, brackets, stops, etc. (following page). In addition, there is a full assortment of construction brackets, below, designed specifically for aluminum rail. **All mounting hardware included with brackets.** Brackets have black polyester finish with zinc plated steel hardware.

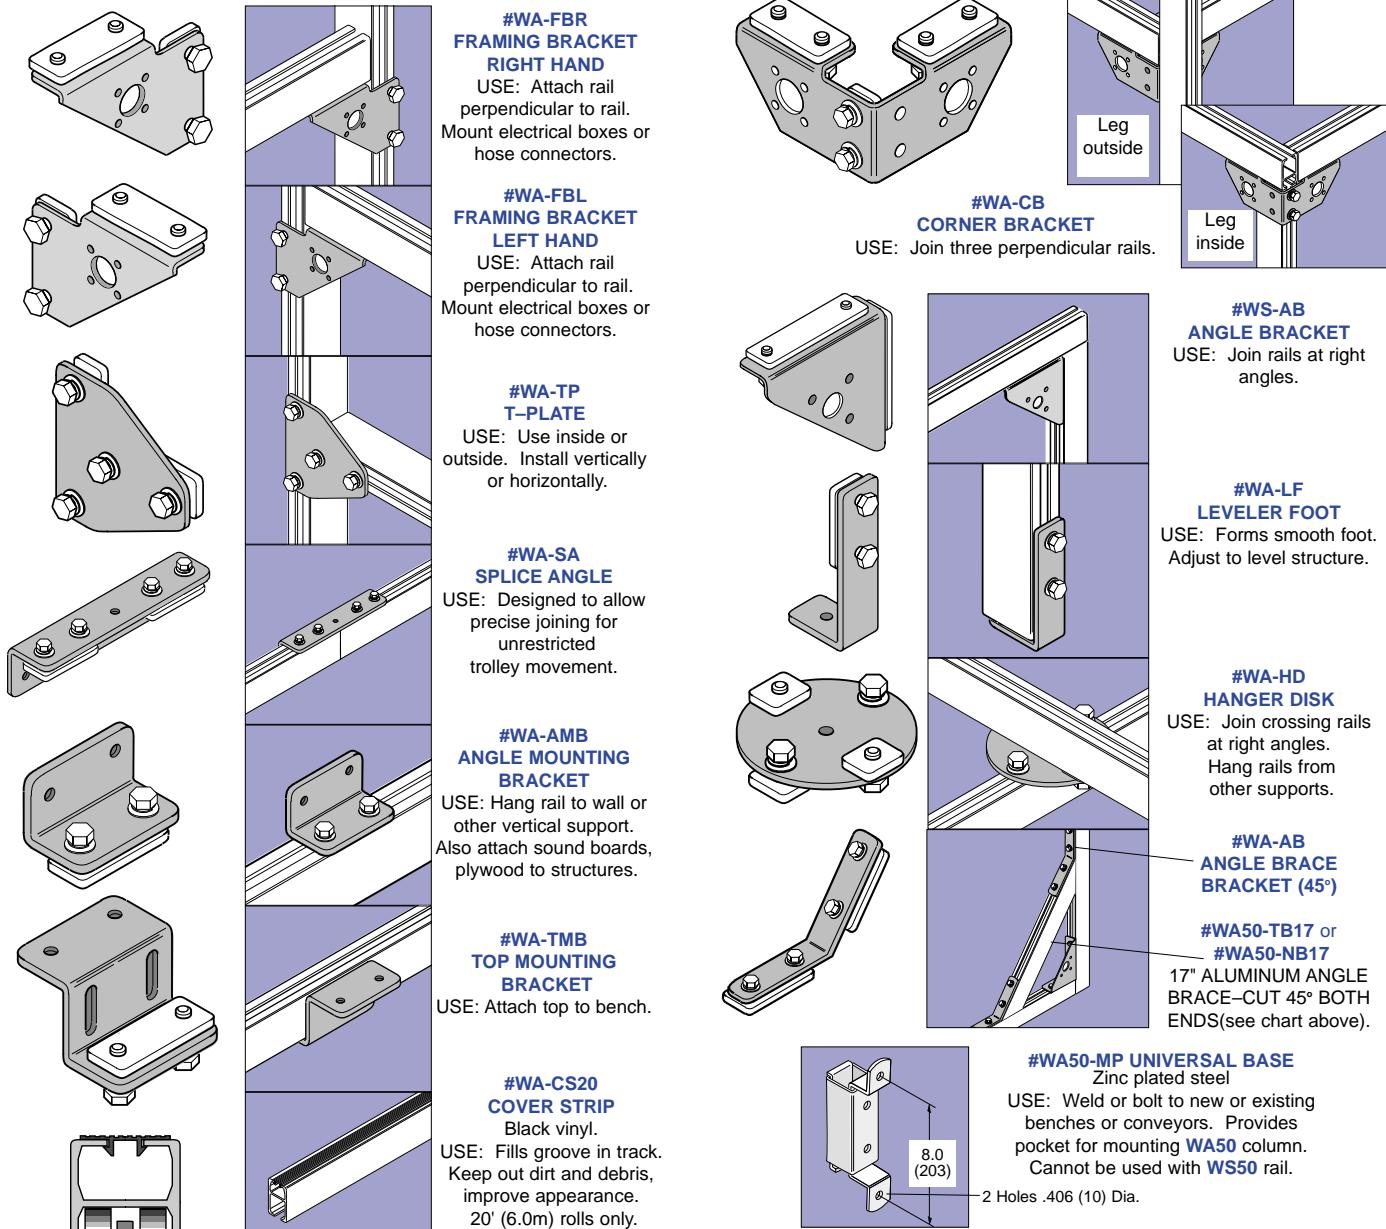

## COMPONENTS



Workplace Solutions

## COMPONENTS




Workplace Solutions

# STEEL TRACK, 50 lb.

RAIL LENGTH ft. (m)	MODEL NUMBER
3.0 (0.9)	#WS50-T03
4.0 (1.2)	#WS50-T04
5.0 (1.5)	#WS50-T05
6.0 (1.8)	#WS50-T06
7.0 (2.1)	#WS50-T07
8.0 (2.4)	#WS50-T08
9.0 (2.7)	#WS50-T09
10.0 (3.0)	#WS50-T10
12.0 (3.6)	#WS50-T12

Consult factory for lengths not shown above.

For loads up to 50 lbs.(22.5 kg)

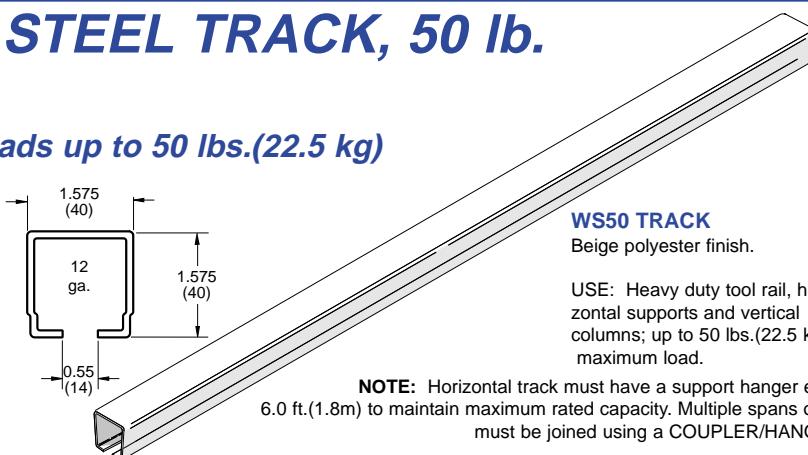

### WS50 TRACK




Beige polyester finish.

USE: Heavy duty tool rail, horizontal supports and vertical columns; up to 50 lbs.(22.5 kg) maximum load.

NOTE: Horizontal track must have a support hanger every 6.0 ft.(1.8m) to maintain maximum rated capacity. Multiple spans of rail must be joined using a COUPLER/HANGER.

Separate **TOOL RAIL COMPONENTS** allow you to quickly and inexpensively build your own work stations, retrofit existing stations or customize a kit. Finished as shown, all parts are the same high quality included with kits and guaranteed to be interchangeable. All mounting hardware is included.

All components below fit WS50 track. Items *outside* blue box may also be used with WA50 Extruded Aluminum Track.

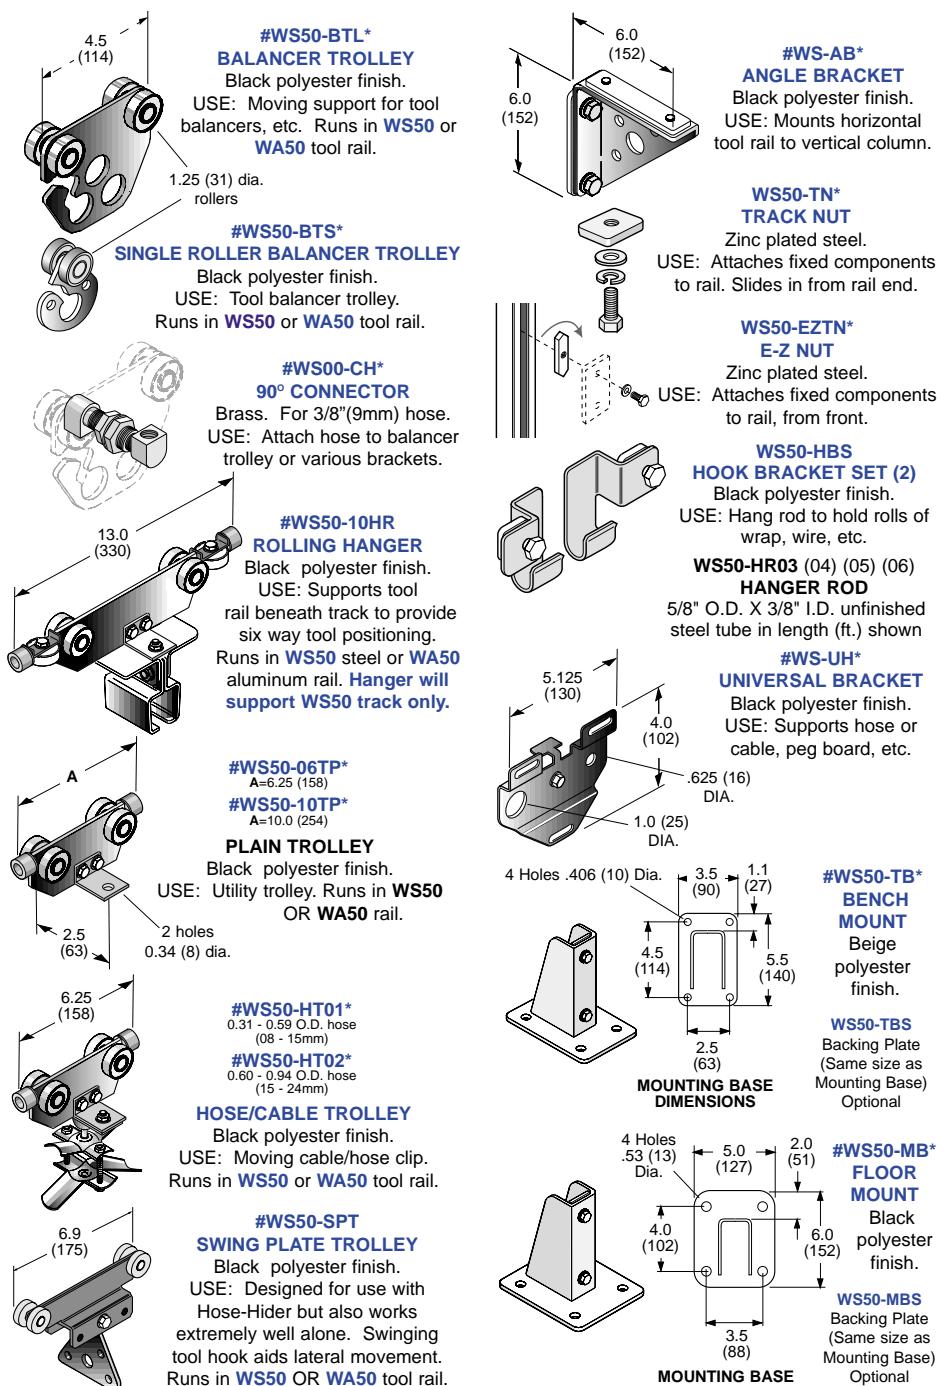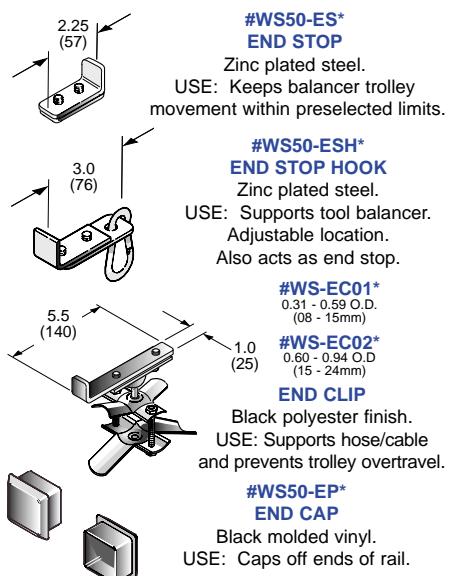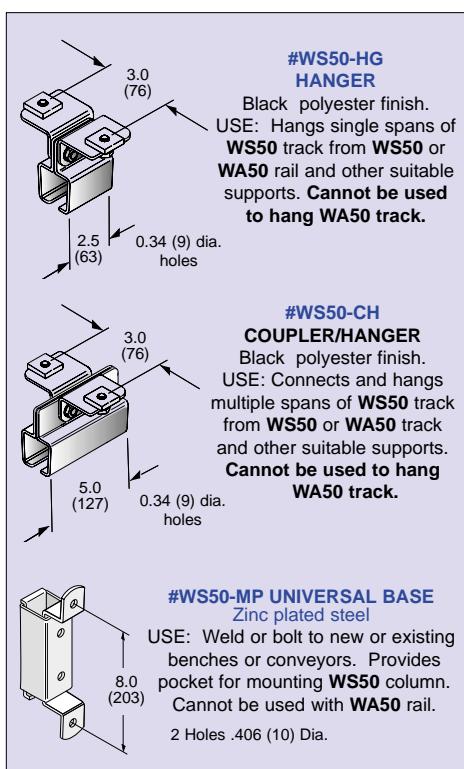

# STEEL TRACK, 30 lb.

## COMPONENTS




Workplace Solutions

RAIL LENGTH ft. (m)	MODEL NUMBER
3.0 (0.9)	#WS30-T03
4.0 (1.2)	#WS30-T04
5.0 (1.5)	#WS30-T05
6.0 (1.8)	#WS30-T06
7.0 (2.1)	#WS30-T07
8.0 (2.4)	#WS30-T08
9.0 (2.7)	#WS30-T09

Consult factory for lengths not shown above.

For loads up to 30 lbs.(13.5 kg)




### WS30 TRACK

Beige polyester finish.


USE: Standard duty tool rail and horizontal supports up to 30 pounds maximum load.

NOTE: Horizontal track must have a support hanger every 6.0 ft.(1.8m) to maintain maximum rated capacity.

Multiple spans of rail must be joined using a COUPLER/HANGER.

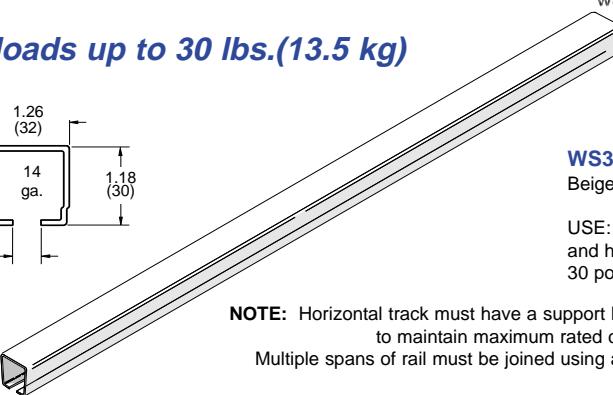

Separate **TOOL RAIL COMPONENTS** allow you to quickly and inexpensively build your own work stations, retrofit existing stations or customize a kit. Finished as shown, all parts are the same high quality included with kits and guaranteed to be interchangeable. Components shown designed for use with **WS30** rail. Starred (\*) items may also be used with **WS50** or extruded aluminum rails. **Mounting hardware, where required, is included.**

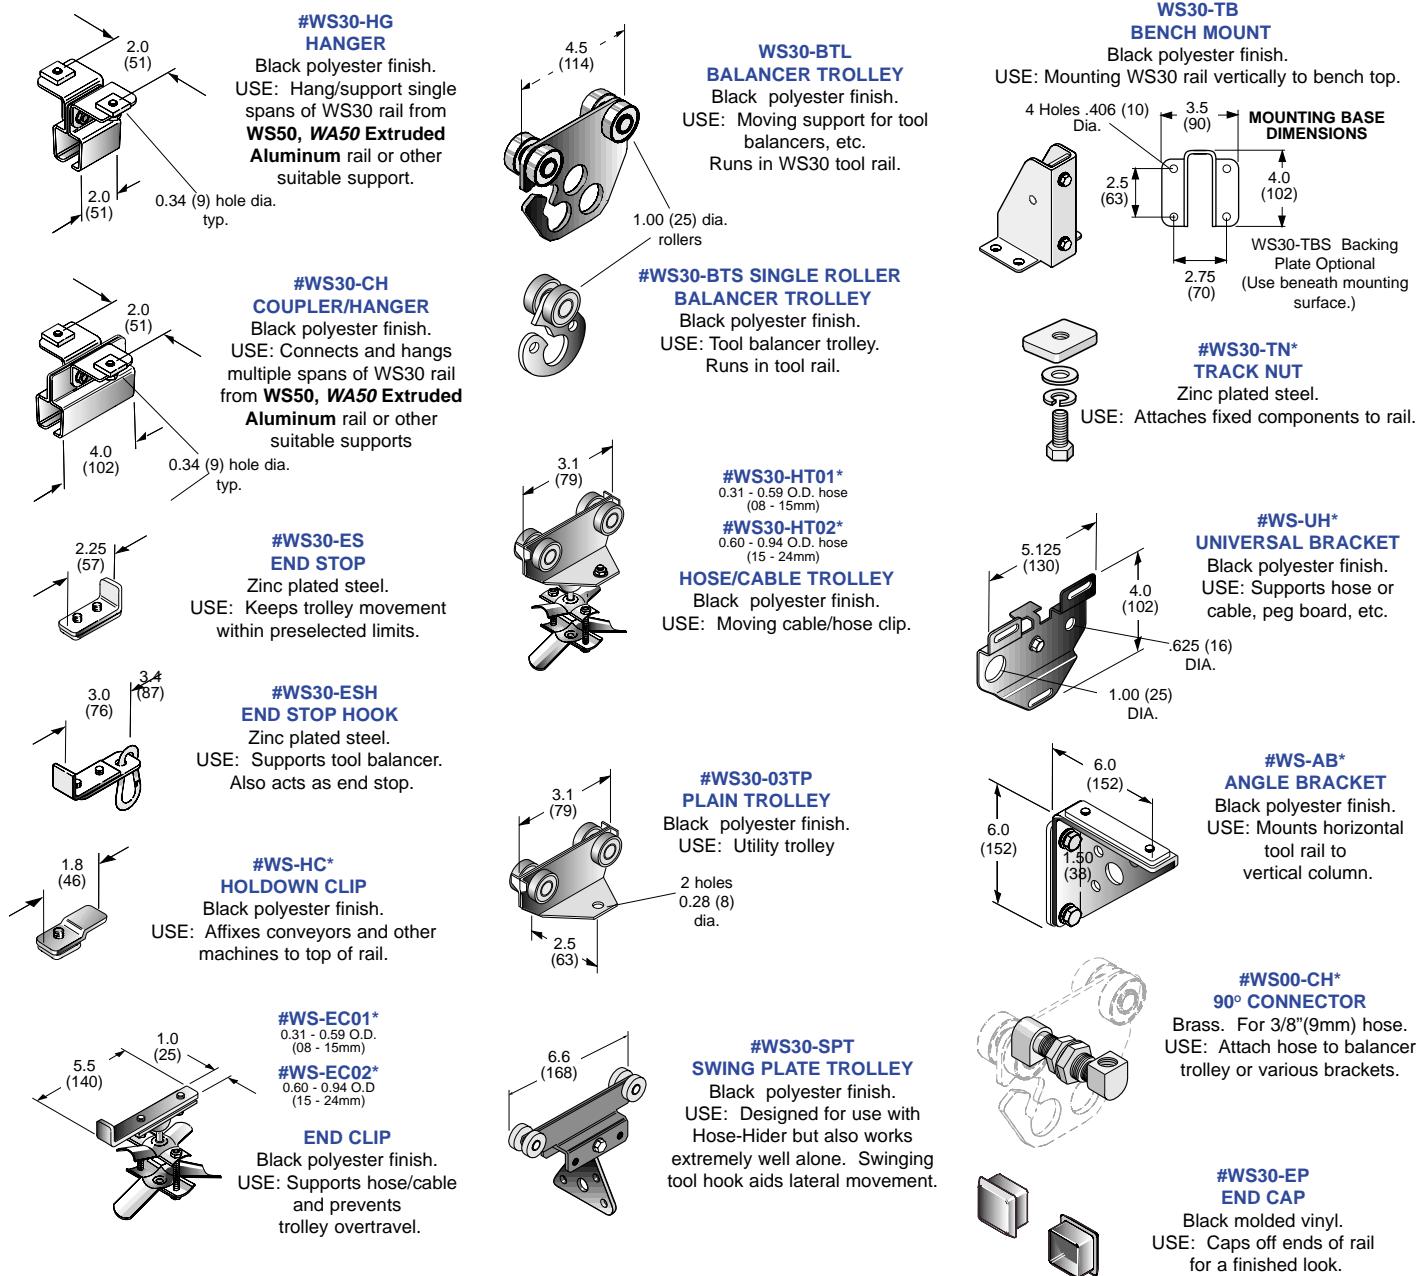


HUBBELL

Workplace Solutions

## FIXED OR 180° SWINGING WS50 BOOMS

USE: **Wall or column mounted** tool rail. Or use two fixed booms as support for horizontal tool rail (cross rail and hangers not included). End stop and end cap included. Eight foot (2.4m), ten foot (0.3m) and 18 foot (5.4m) booms include ladder style reinforcing superstructure. Trolley extra.

Beige polyester finish.

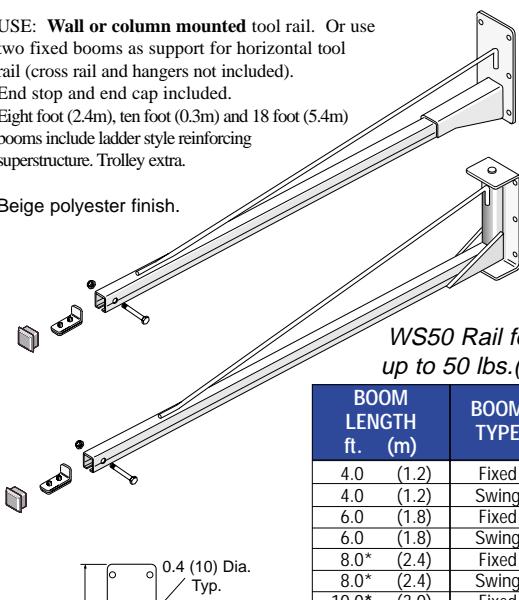


BOOM LENGTH ft. (m)	BOOM TYPE	MODEL NO.
4.0 (1.2)	Fixed	#WF50-WS04
4.0 (1.2)	Swing	#WS50-WS04
6.0 (1.8)	Fixed	#WF50-WS06
6.0 (1.8)	Swing	#WS50-WS06
8.0* (2.4)	Fixed	#WF50-WS08
8.0* (2.4)	Swing	#WS50-WS08
10.0* (3.0)	Fixed	#WF50-WS10
10.0* (3.0)	Swing	#WS50-WS10
18.0* (5.4)	Swing	#WS50-WS18

\*Features ladder style reinforcing rather than tie rod. Model WS50-WS18 has stacked (doubled) rail for additional strength.

TYPE	Dim. A in. (mm)
Swing	8.12 (206)
Fixed	7.75 (197)

## MOUNTING HOLE LAYOUT 4'-10' BOOMS




## MOUNTING HOLE LAYOUT 18' BOOM

18' BOOM

CAUTION:

Mount 18' boom to wall or building column only. Do not mount on 3" column.


These bases are larger than those listed with the track components and are used primarily when a more rigid structure is desired. All bases include hardware for mounting rail to base.

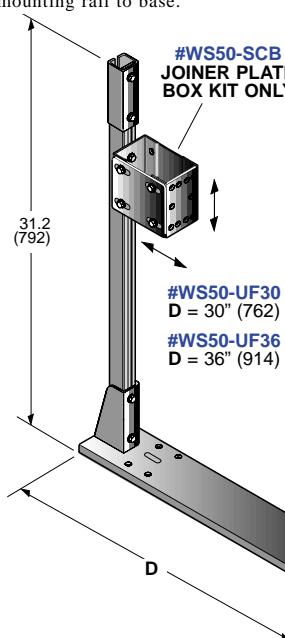

## BENCH LEG BASE


USE: Mounts workstation to bench by providing a "pocket" into which WS50 track may be fitted. Models for 30" (762) or 36" (914) deep benches. Universal hole pattern in foot plus adjustable "Joiner Plate Box" provide solid grip to the bench leg. Includes hardware required for mounting rail to base. Does not include hardware required to mount base to bench. Joiner plate box included and also available separately.

Black polyester finish.



## Rail Mounted Fixed or Swing Booms

USE: **Tool rail mounted** to WS50 or WA50 vertical column. End stop, end cap, safety bolt and all hardware included. Trolley extra. Beige polyester finish.

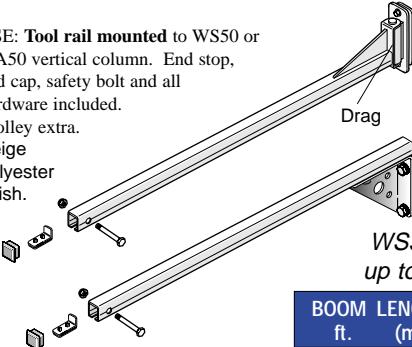



WS30 Rail for loads up to 30 lbs (13.5 kg)

BOOM LENGTH ft. (m)	BOOM TYPE	MODEL NO.
3.0 (0.9)	Fixed	#WF30-DS03
3.0 (0.9)	Swing	#WS30-DS03

## Wall Mounted Booms

USE: **Wall mounted** tool rail. End stop, end cap and safety bolt included. Trolley extra.

Beige polyester finish

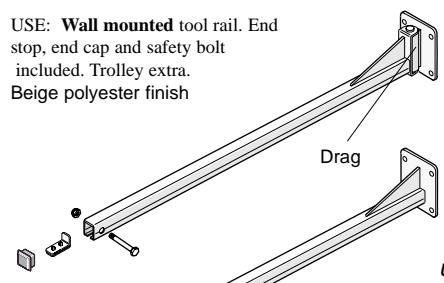

WS30 Rail for loads up to 30 lbs (13.5 kg)

BOOM LENGTH ft. (m)	BOOM TYPE	MODEL NO.
3.0 (0.9)	Fixed	#WF30-WS03
3.0 (0.9)	Swing	#WS30-WS03

## #WS-UB U-BOLT ASSEMBLY

USE: Secures 4'-10' booms or other flat plates to 3" dia. vertical column. Three required to mount boom. Do not use for mounting 18' boom (#WS50-WS18).

Zinc plated steel




## Bases and Supports

## TABLE BRACKETS

Black polyester finish.

USE: Mounts WS50 or WA50 vertical support columns to typical work bench. Provides greater rigidity when mounted to sheet metal tops than standard bases. For even greater strength, use model #WS50-BBS backing plate (optional) beneath bench top. Includes hardware for mounting rail to bracket. Does not include hardware for mounting base to bench.




## SUPPORT CLAMP

## WS50-SC-For WS50 (steel) Rail

## WA50-SC-For WA50 (Aluminum) Rail

Black polyester finish.

USE: Fastens rail to back of bench for added stability. Typically used with WS50-MB base. **WS60-SC-For WS60 (steel) Rail also available. Mounting dimensions differ from WS50-SC.**



# ORGANIZE YOUR WORK SITE

## INFORMATION, DOCUMENTATION & INSPECTION STANDS

Qualtech



Workplace Solutions



DOCUMENT PROTECTOR  
with  
FLEXIBLE ARM

DOCUMENT PROTECTORS are available with either "A" size 8.5" x 11" or "B" size 11" X 17" sheet protectors. Steel protector frames are mounted on 18" flexible arms with clamp that can be easily affixed to desk top or table. Wall mount units include mounting screws and anchors.



WALL MOUNTED  
DOCUMENT  
STAND

WALL or BENCH MOUNTED DOCUMENT STAND features yellow high impact polystyrene document holder and writing surface on heavy duty steel support.

Mounts easily to wall or bench top. Includes two clips. 9" x 13" writing surface has hinged, clear plastic document protector.

Description	Ship Wgt.	Model Number
Bench Mounted Document Stand	13 lbs.	A800B
Wall Mounted Document Stand	13 lbs.	A800W




DELUXE  
13" x 26"  
DOCUMENT  
STAND

DOCUMENT STAND, larger than the A900S (above, right) features two 26"W x 13"H panels. It is also available in a Deluxe version. All models have a writing surface with two clips and hinged, clear document protector. Standard model has three glides.

Deluxe model includes three locking casters, lockable tray beneath writing panel, side tray, solar powered calculator, and clear hinged acrylic panels on display panel. Writing surface is 38" high. Overall height 61". Panels are yellow high impact polystyrene. Wall mounted unit also available.

Description	Ship Wgt.	Model Number
Standard Document Stand	28 lbs.	A1000S
Deluxe Document Stand	34 lbs.	A1000D
Wall Mounted Document Stand	26 lbs.	A1000SW

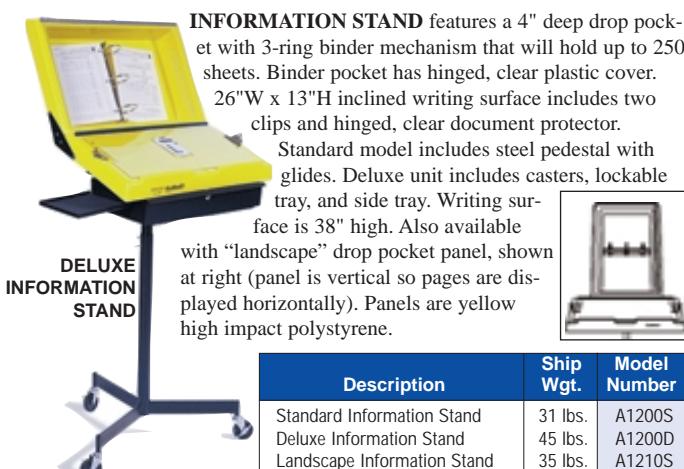

DELUXE  
INFORMATION  
STAND

INFORMATION STAND features a 4" deep drop pocket with 3-ring binder mechanism that will hold up to 250 sheets. Binder pocket has hinged, clear plastic cover. 26"W x 13"H inclined writing surface includes two clips and hinged, clear document protector.

Standard model includes steel pedestal with glides. Deluxe unit includes casters, lockable tray, and side tray. Writing surface is 38" high. Also available with "landscape" drop pocket panel, shown at right (panel is vertical so pages are displayed horizontally). Panels are yellow high impact polystyrene.



Description	Ship Wgt.	Model Number
Standard Information Stand	31 lbs.	A1200S
Deluxe Information Stand	45 lbs.	A1200D
Landscape Information Stand	35 lbs.	A1210S

\*The configuration of these workstands is a registered trademark of Hubbell, Inc.

Description	Ship Wgt.	Model Number
"A" size-18" Flexible Arm Mount w/10 pages (yellow pockets)	5 lbs.	A700
"A" size-18" Flexible Arm Mount w/20 pages (yellow pockets)	6 lbs.	A720
"A" size-18" Flexible Arm Mount w/30 pages (yellow pockets)	7 lbs.	A730
"A" size-Wall Mount w/10 pages (yellow pockets)	5 lbs.	A700W
"A" size-Wall Mount w/20 pages (yellow pockets)	6 lbs.	A720W
"A" size-Wall Mount w/30 pages (yellow pockets)	7 lbs.	A730W
"B" size-18" Flexible Arm Mount w/10 pages (multi-color pockets)	7 lbs.	A700B
"B" size-Wall Mount w/10 pages (yellow)	7 lbs.	A700BW



13" x 20"  
DOCUMENT  
STAND

DOCUMENT STAND features two 20"W x 13"H panels; a document display board with two clips above an inclined writing surface. Writing surface includes two clips and hinged, clear document protector. Heavy-duty steel stand has three glides. Writing surface is 38" high. Overall height 61". Panels are yellow high impact polystyrene. Also available as wall mounted unit similar to A800W, left.

Description	Ship Wgt.	Model Number
Floor Mounted Document Stand	27 lbs.	A900S
Wall Mounted Document Stand	25 lbs.	A900SW



STANDARD  
"C" SIZE  
DOCUMENT  
STAND

Even larger DOCUMENT STAND features 26"W x 20"H back display panels designed for "C" sized drawings. Writing panel is 26" x 13". Includes writing surface with two clips and hinged, clear document protector. Stand has three glides. Writing surface is 38" high. Overall height 61". Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Standard "C" Size Document Stand	30 lbs.	A1500S



MESSAGE  
BOARD

MESSAGE BOARD features 24"W x 18"H dry erase board above an inclined writing surface. Writing surface includes two clips and hinged, clear document protector. Heavy-duty steel stand has three glides. Writing surface is 38" high. Overall height 61". Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Message Board with Floor Stand	31 lbs.	A1600S


**CATALOG DISPLAY STAND**

**CATALOG DISPLAY STAND** makes an ideal reference center for product catalogs, specification sheets or repair manuals. Angled lower panel has twelve 1" three ring binder sections. Back 13" x 26" display panel includes two clips. Sturdy steel stand has dual columns and four feet with glides. Panels are yellow high-impact polystyrene.

Description	Ship Wgt.	Model Number
Catalog Display Stand	46 lbs.	A1700S


**INSPECTION STAND**

**INSPECTION STAND** features recessed 9" x 12" cushioned parts tray and 12" x 12" writing surface plus a 13" x 26" back display panel with two clips. Panels are yellow high impact polystyrene. Non-adjustable stand has three glides. Writing surface is 38" high.

Description	Ship Wgt.	Model Number
Inspection Stand	28 lbs.	A2600S


**STANDARD BLUEPRINT DISPLAY STAND with WRITING SURFACE**

**BLUEPRINT DISPLAY STAND plus WRITING SURFACE** features a 36"W x 26"H display panel with three clips for "D" size prints. Inclined writing surface includes two clips and hinged and clear document protector. Standard model has four glides on steel stand. Deluxe model includes four casters, lockable tray, side tray, solar powered calculator and clear acrylic cover hinged to back panel. Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Standard Blueprint Display Stand	76 lbs.	A4500S
Deluxe Blueprint Display Stand	85 lbs.	A4500D


**BLUEPRINT DISPLAY STAND**

**BLUEPRINT DISPLAY STAND** features 36"W x 26"H panel with three clips for "D" size prints. Base has five legged steel stand with glides. Panel is yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Blueprint Display Stand	40 lbs.	A4000S


**STANDARD DOCUMENT STAND with FLAT WRITING PANEL**

**DOCUMENT STAND with FLAT WRITING PANEL**, is available in two sizes. **Model A2000S** has two 26"W x 13"H panels. **Model A2500S** features a 26"W x 20"H back panel for "C" size documents and 26" x 13" writing panel. Both models have a writing surface with two clips and hinged, clear document protector. There are two clips on the back panel. Stand has three glides. Writing surface is 38" high. Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Standard 13" x 26" Document Stand	28 lbs.	A2000S
Standard 20" x 26" Document Stand	30 lbs.	A2500S


**DELUXE INSPECTION STAND**

**INSPECTION STAND** includes a 20" x 26" cushioned work surface and 13" x 26" back display panel with two clips. Deluxe version includes four locking casters, lockable utility drawer, and clear hinged acrylic panels on display panel. Standard model has four glides. Both models have dual column stand. Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Standard Inspection Stand	32 lbs.	A2700S
Deluxe Inspection Stand	36 lbs.	A2700D


**DELUXE LARGE DISPLAY INSPECTION STAND**

**DELUXE LARGE DISPLAY INSPECTION STAND** features 36"W x 26"H display panel with nine clips and 20" x 26" cushioned flat work surface. Deluxe model (standard model is not available) includes four casters on dual column stand and lockable utility drawer. Panels are yellow high impact polystyrene.

Description	Ship Wgt.	Model Number
Large Display Inspection Stand	101 lbs.	A2750D


**PARTS CADDY**

**PARTS CADDY** features 36"L x 26"W x 1 3/4"D tray with cushioned liner. Heavy-duty stand with four locking casters.

Description	Ship Wgt.	Model Number
Mobile Parts Caddy	50 lbs.	A4600S

# PROTECT & SECURE YOUR COMPUTERS

## COMPUTER ENCLOSURES and STANDS

**Qualtech**



Workplace Solutions



**DESKTOP SYSTEM ENCLOSURE** was designed for shop and warehouse environments. Protects monitor, desktop CPU and keyboard. Includes fan and filter assembly, locking keyboard and CPU doors and surge suppressing outlet strip. Dimensions for 14"/15" monitor unit: 22"W x 28"H (front, 24.5"H back) x 24.75"D. Dimensions for 17" monitor unit: 22"W x 29"H (front, 25"H back) x 24.75"D.

### DESKTOP CPU/KEYBOARD ENCLOSURE

(available separately) includes fan and filter, locking keyboard and CPU doors. Maximum CPU dimensions: 20.5"W x 8.5"H x 19"D.

**MONITOR ENCLOSURE** (does not include CPU/keyboard enclosure) includes fan and filter assembly. See dimensions below.

Description	Ship Wgt.	Model Number
Desktop System Enclosure for 14"/15" Monitor	67 lbs.	AQCS3000
Desktop System Enclosure for 17" Monitor	67 lbs.	AQCS3005
Desktop CPU/Keyboard Enclosure (only)	30 lbs.	AQCS3400
14"/15" Monitor Enclosure O.D: 18"W x 18"H (front, 14.5"H back) x 19.75"D	30 lbs.	AQCS3500
17" Monitor Enclosure O.D: 20"W x 19"H (front, 15"H back) x 22.75"D	32 lbs.	AQCS3505



**KEYBOARD ENCLOSURE** protects keyboard from dust and dirt and locking door helps maintain a secure intranet system. Accommodates keyboard up to 8.5"D x 22"W. Outside dimensions: 18.5"W x 4.5"H x 23"D.

Description	Ship Wgt.	Model Number
Keyboard Enclosure	40 lbs.	AQCS3200



**TOWER SYSTEM ENCLOSURE** offers maximum protection for monitor, tower CPU and keyboard. Includes fan and filter assembly, locking keyboard and CPU doors and surge suppressing outlet strip. Outside dimensions for 14"/15" monitor unit: 27.5"W x 21.5"H (front, 18"H back) x 21.25"D. Dimensions for 17"/19" monitor unit: 31.5"W x 24"H x 25.25"D (flat top).

### TOWER CPU ENCLOSURE

is also available separately. Includes a fan and filter plus locking door. Outside dimensions: 10"W x 23.5"H (front, 20"H back) x 21.25"D.

Description	Ship Wgt.	Model Number
Tower System Enclosure for 14"/15" Monitor	85 lbs.	AQCS3100
Tower System Enclosure for 17" Monitor	87 lbs.	AQCS3105
Tower CPU Enclosure (only)	30 lbs.	AQCS3150



**PRINTER ENCLOSURE** keeps out dust and dirt. Locking door provides security. Outside dimensions: 24"W x 9"H (front, 12.25"H back) x 20.25"D. Optional accessories include fan and filter assembly and paper guides. See list below.

Description	Ship Wgt.	Model Number
Printer Enclosure	29 lbs.	AQCS3300
Fan and Filter Assembly (optional extra)	5 lbs.	B3301
Paper Guides (optional extra)	4 lbs.	B3302

## NEW from QUALTECH® WORKSTANDS

### Kaizen Event Display Stand

Designed for Kaizen Planning Events, this "D" sized display will find multiple uses around the shop and office, wherever small group communication is necessary. It comes supplied with one laminated "D" size planning chart (for wipe-off markers) and five pre-printed paper charts. Yellow high impact polystyrene display panel is 36"W x 26"H can also hold flip charts or display boards. Heavy duty stand features four locking casters. Panel can be tilted from vertical to horizontal. Three clips hold charts securely in place and a handy tray keeps markers within reach.



Description	Ship Wgt.	Model Number
Kaizen Event "D" size Display Stand	53 lbs.	A4000KBOB
Laminated Kaizen Planning Chart-22" x 34"	2 lbs.	B4048
22" x 34" Planning Sheets-5 pac	2 lbs.	B4049