

INDUSTRIAL DUTY CORD REELS

Open Spool Cord reels with fluorescent or incandescent lamp, single or dual outlets. Reels are also available with bare cord end. All Reels include Automatic Spring Rewind and a Multi-position Four Roller Cord Guide and a 48" Supply Pigtail with Three Prong Plug.



**Reel with
FLUORESCENT LAMP**

These reels are ideal for a wide variety of industrial applications mounted from wall, ceiling or under work bench. These reels are available with your choice of single or dual outlet, incandescent hand lamp, fluorescent hand lamp or with bare cord. Cord lengths from 25' to 70'. All reels include an adjustable cord stop, automatic spring rewind and ratchet lock. Operator simply pulls cord off spool. Ratchet lock maintains desired cable length and, when task is completed, a slight pull releases the ratchet allowing the spring motor

rewind the cord. Reels feature heavy steel frame with baked-on polyester finish. Collector housing is made from a non-conductive, hi-impact thermoplastic. Both hand lamps include an on-off switch. The Fluorescent Lamp features a directed light with a polycarbonate outer tube and an integral ballast. The Twenty amp Dual Outlet Box includes a ground fault circuit interrupter (GFCI). Consult factory if installation height is greater than 16'.



**Reel with
INCANDESCENT LAMP**



**Reel with
SINGLE OUTLET**



**Reel with
DUPLEX OUTLET BOX**


MODEL LIST—CORD REELS

Incl. Cord	Accessory	Amps	CORD DATA*			Weight lbs. (kg)	Model
			AWG	Cond.	Length ft. (m)		
Yes	Incandescent	15	16	3	25 (8)	23.3 (10.6)	GCA16325-HL
Yes	Incandescent	15	16	3	35 (11)	24.2 (11.0)	GCA16335-HL
Yes	Incandescent	15	16	3	50 (15)	25.6 (11.6)	GCA16350-HL
Yes	Incandescent	15	16	3	70 (21)	40.0 (18.2)	GCC16370-HL
Yes	Fluorescent	0.3	16	3	25 (8)	23.8 (10.8)	GCA16325-FL
Yes	Fluorescent	0.3	16	3	35 (11)	24.7 (11.2)	GCA16335-FL
Yes	Fluorescent	0.3	16	3	50 (15)	26.0 (11.8)	GCA16350-FL
Yes	Fluorescent	0.3	16	3	70 (21)	40.5 (18.4)	GCC16370-FL
Yes	Single Recept	15	16	3	25 (8)	22.8 (10.4)	GCA16325-SR
Yes	Single Recept	15	16	3	35 (11)	23.7 (10.8)	GCA16335-SR
Yes	Single Recept	15	16	3	50 (15)	25.0 (11.4)	GCA16350-SR
Yes	Single Recept	15	16	3	70 (21)	35.3 (16.1)	GCC16370-SR
Yes	Single Recept	15	14	3	25 (8)	24.5 (11.1)	GCA14325-SR
Yes	Single Recept	15	14	3	35 (11)	26.1 (11.8)	GCA14335-SR
Yes	Single Recept	15	14	3	50 (15)	28.5 (12.9)	GCA14350-SR
Yes	Single Recept	15	14	3	70 (21)	36.6 (16.6)	GCC14370-SR
Yes	Single Recept	20	12	3	25 (8)	23.7 (10.8)	GCA12325-SR
Yes	Single Recept	20	12	3	35 (11)	25.0 (11.4)	GCA12335-SR
Yes	Single Recept	20	12	3	45 (14)	26.9 (12.3)	GCA12345-SR
Yes	Single Recept	20	12	3	50 (15)	42.7 (19.4)	GCC12350-SR
Yes	Single Recept	20	12	3	70 (21)	47.6 (21.6)	GCC12370-SR
Yes	Dual Recept	20	12	3	25 (8)	23.4 (10.6)	GCA12325-DR
Yes	Dual Recept	20	12	3	35 (11)	24.7 (11.2)	GCA12335-DR
Yes	Dual Recept	20	12	3	45 (14)	26.0 (11.8)	GCA12345-DR
Yes	Dual Recept	20	12	3	50 (15)	44.2 (20.1)	GCC12350-DR
Yes	Dual Recept	20	12	3	70 (21)	49.1 (22.3)	GCC12370-DR
Yes	None	15	16	3	25 (8)	521.7 (9.9)	GCA16325-BC
Yes	None	15	16	3	35 (11)	22.4 (10.2)	GCA16335-BC
Yes	None	15	16	3	50 (15)	23.4 (10.6)	GCA16350-BC
Yes	None	15	16	3	70 (21)	34.8 (18.8)	GCC16370-BC
Yes	None	15	14	3	25 (8)	22.2 (10.1)	GCA14325-BC
Yes	None	15	14	3	35 (11)	23.1 (10.5)	GCA14335-BC
Yes	None	15	14	3	50 (15)	24.4 (11.1)	GCA14350-BC
Yes	None	15	14	3	70 (21)	36.2 (16.4)	GCC14370-BC
Yes	None	20	12	3	25 (8)	23.2 (10.6)	GCA12325-BC
Yes	None	20	12	3	35 (11)	24.5 (11.1)	GCA12335-BC
Yes	None	20	12	3	45 (14)	25.8 (11.7)	GCA12345-BC
Yes	None	20	12	3	50 (15)	42.2 (19.2)	GCC12350-BC
Yes	None	20	12	3	70 (21)	47.1 (21.4)	GCC12370-BC

* All cords Type SJOW-A/SJO.



CORD REEL DIMENSIONS—inches (mm)

Reel size "A" (third letter in model number)

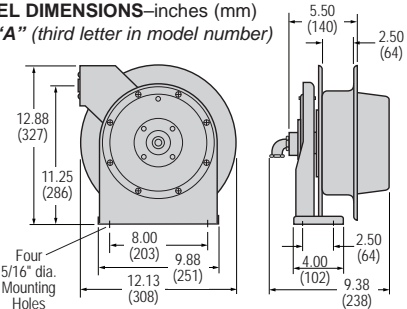

CORD REEL DIMENSIONS—inches (mm)

Reel size "C" (third letter in model number)

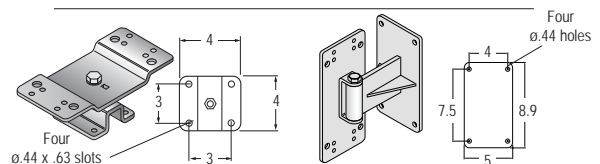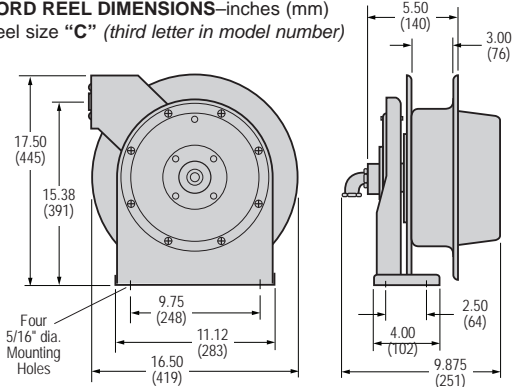

Optional 340° Pivot Base
Model RC-PB-B (left, above)

Reel follows activity for smoother operation, reduced cord wear.

Optional Wall Mounted Pivot Base
Model RC-WP (right, above)
Provides 180° pivot.

NOTE: Either base fits all reel sizes.