

HUBBELL A HUBBELL COMPANY

## **ADJUSTABLE BEAM TROLLEYS**

Our **ADJUSTABLE BEAM TROLLEYS** are designed with your applications in mind. Economical, durable and expandable, our festoon cable trolley runs on various beam sizes (See below for listing; consult factory for additional size requirements). These trolleys roll on 4 steel ball bearing wheels. This provides a rolling capacity of 154 lbs. Multiple cable saddle configurations provide a variety of cable carrying options for single or dual flat cable or round cable.

S-BEAM Intermediate or Tow Trolley



Flat Cable: F-IT-S3/5.7

Round Cable: F-IT-S3/5.7R2 - 0.60"-0.94" dia F-IT-S3/5.7R3 - 0.94"-1.25" dia

End Clamps with choice of Trolley



F-ICE/R2 - 0.60"-0.94" dia Round F-ICE/R3 - 0.94"-1.25" dia Round F-ICE - single saddle 3" dia Flat F-ICE-D - dual saddle 3" dia Flat

## **BENEFITS OF CONSTRUCTION**

-Steel construction with zinc finish for moisture protection

-Steel chassis expands for a range of I-Beam sizes (S-Beam: S3 x 5.7, S4 x 7.7, S6 x 12.5; W-Beam: W6 x 9, W8 x 28, fits W-Beam with a flange ranging in size from 3.94" - 6.54". Consult factory for other beam sizes.)

-Wheels are manufactured with threaded axels, bolted (not riveted) onto the chassis for easy replacement if required

W-BEAM Intermediate or Tow Trolley



Flat Cable: F-IT-W-F

Round Cable: F-IT-W-R1 - 0.31"-0.59" dia F-IT-W-R2 - 0.60"-0.94" dia

### Balancer Trolley for hanging Tool Balancer



S-Beam: F-IT-B-S3/5.7-TB W-Beam: F-IT-W-TB

Intermediate or Tow Trolley with dual cable saddles




S-Beam Flat Cable: F-IT-S3/5.7D W-Beam Flat Cable: F-IT-WD

Control Box Trolley for Push Button Pendant connection



S-Beam: F-ITB-S3/5.7 W-Beam: F-ITB-W

## ACCESSORIES




# **DRAWINGS / DIMENSIONS**

Side View Front View

#### S-BEAM TROLLEYS

**W-BEAM TROLLEYS** 

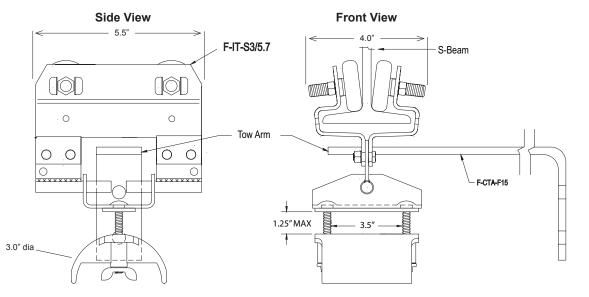

#### **TOW ARMS**

