


# OVERHEAD TOOL CRANE

## SOLVES MANY PROBLEMS

Rugged bridge crane allows overhead tool handling with maximum safety and minimum cost. Uses proven components which mount to standard WS-50 or WA-50 rails. Available as complete kits to speed assembly.

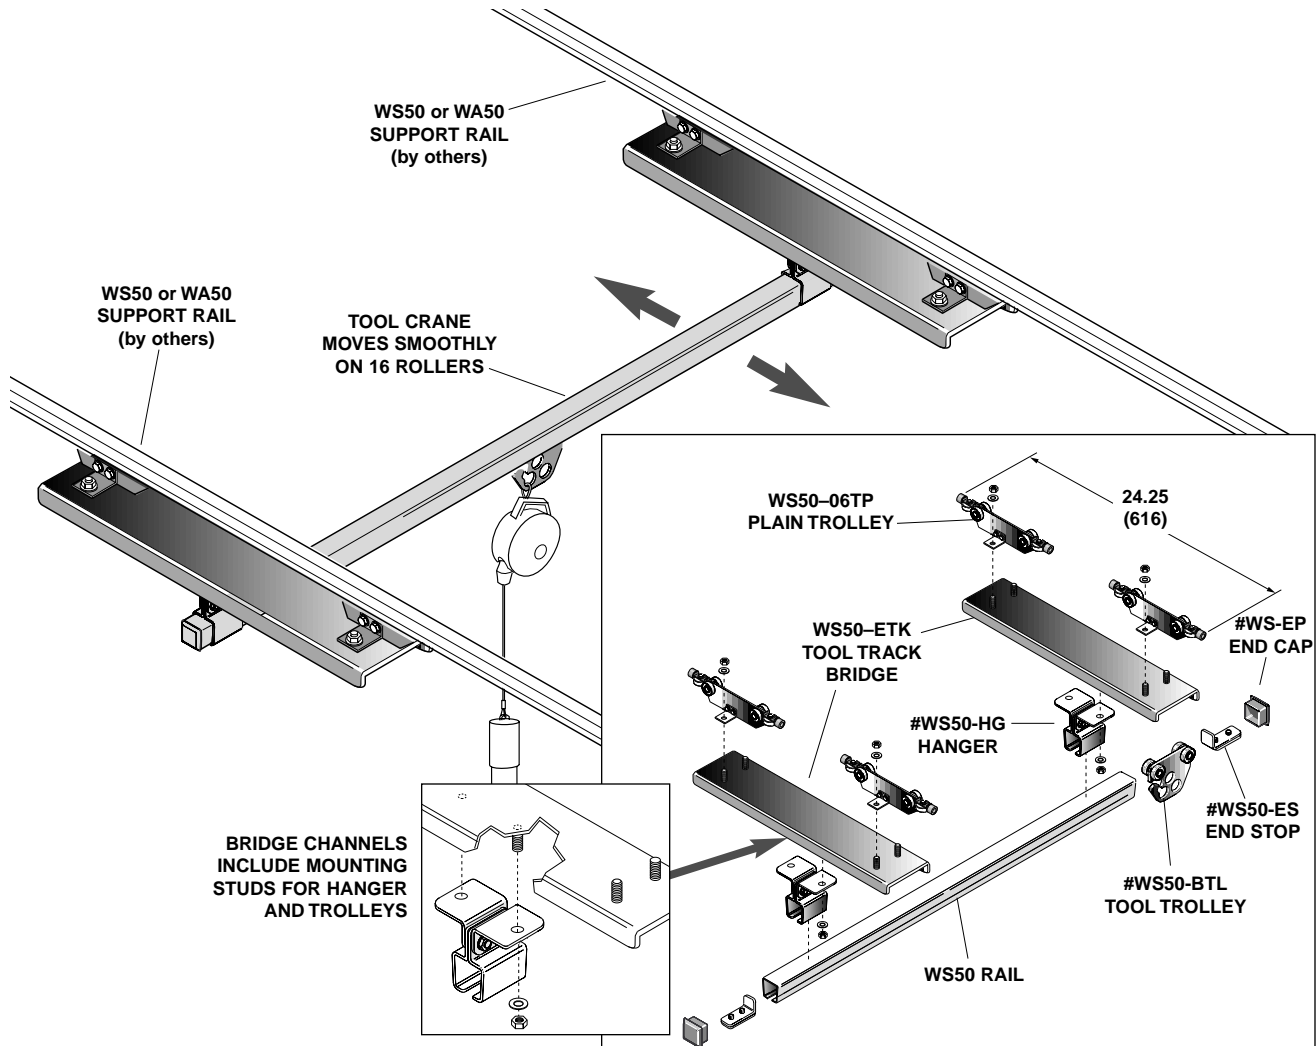

Tool Crane mounts in two WS50 rails. Rails must be parallel and level to allow free travel of crane. Recommended distance between support rails is length of tool rail less 12" (305mm). **MAXIMUM RATED CAPACITY OF TOOL CRANE is 50 lbs (22.5 kg) including tool, balancer, and attachments.** Unit depth is 24.25" (616mm) bumper-to-bumper.

**Overhead Tool Crane** includes (4) WS50-06TP plain trolleys, (2) WS50-ETK tool track bridges, (2) WS50-HG hanger brackets, (2) WS-EP end caps, (2) WS50-ES end stops, (1) WS50-BTL Labyrinth tool trolley, (1) WS50 tool rail (length per model) and all assembly hardware.

### MODEL CHART

DESCRIPTION	MODEL NUMBER
O.H. Tool Crane, 48" long tool rail	WS50-ET04
O.H. Tool Crane, 60" long tool rail	WS50-ET05
O.H. Tool Crane, 72" long tool rail	WS50-ET06
O.H. Tool Crane, 108" long tool rail	WS50-ET09
O.H. Tool Crane, 144" long tool rail	WS50-ET12

**NOTE:** For best results, crane width should not exceed six (6) times trolley wheelbase. Example: 24"(2 ft.) x 6 = 12 ft.



**Workplace Solutions**

P.O. Box 25 • 600 South Clark St. • Mayville, WI 53050-0026 • Phone 920-387-5195